


Overview

HPE ProLiant DL560 Gen10 Server

The HPE ProLiant DL560 Gen10 Server is a high-density, four-socket (4S) server with high performance, scalability and reliability, all in a 2U chassis. Supporting the latest Intel® Xeon® Scalable processors, the HPE ProLiant DL560 Gen10 Server offers greater processing power, up to 3 TB of faster memory, IO of up to eight PCIe 3.0 slots, plus the intelligence and simplicity of automated management with HPE OneView and HPE iLO 5.


The HPE ProLiant DL560 Gen10 Server is the ideal server for business critical workloads, virtualization, server consolidation, database, business processing, and general 4P data-intensive applications where data center space and the right performance are paramount.

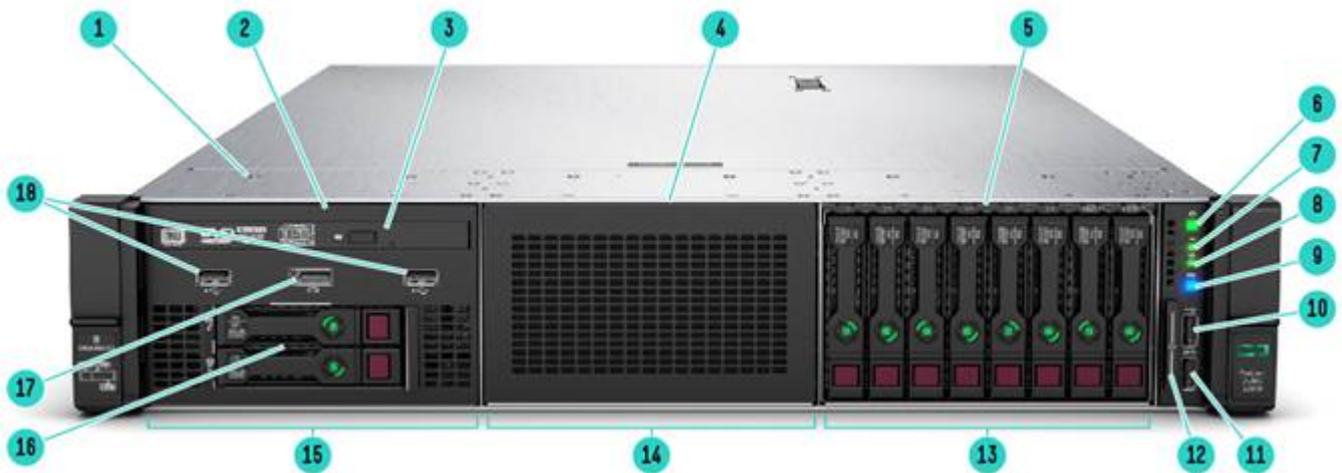

Front View - DL560 Gen10


1. Quick removal access panel
2. Optional Universal Media bay. 2 USB 2.0 and VGA standard (8 SFF bay or 6 SFF+2NVMe optional)
3. Optional Optical drive. Requires Universal Media bay
4. Drive Box 2. (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional)
5. Drive Box 3. (8 SFF, 6SFF+2NVMe optional)
6. Power On/Standby button and system power LED button
7. Health LED
8. NIC status
9. UID button
10. iLO Front Service Port
11. USB 3.0
12. Serial label pull tag
13. Box 3
14. Box 2
15. Box 1
16. Optional 2 SFF HDD, requires optional Universal Media bay
17. Optional front display port (via Universal Media Bay)
18. Optional USB 2.0 (via Universal Media Bay)

Overview

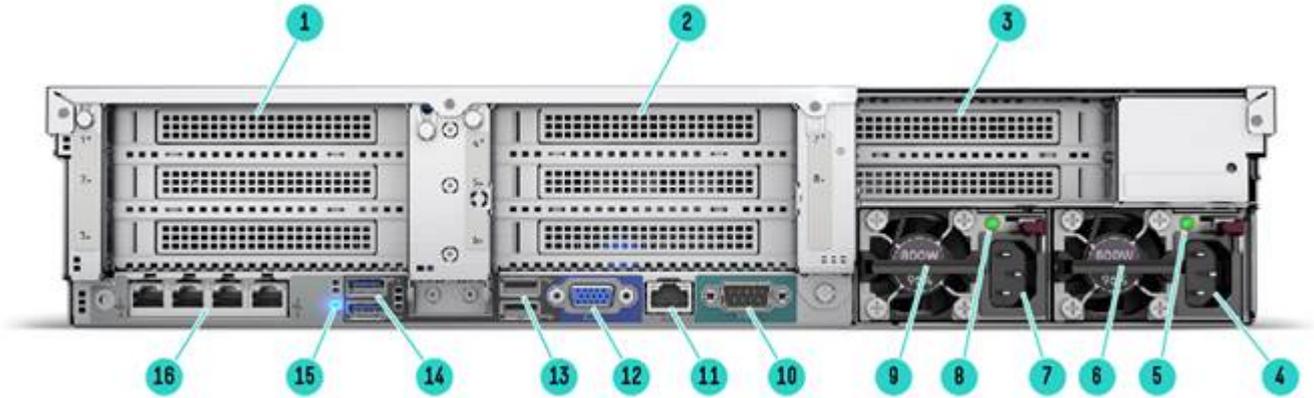

Rear View - DL560 Gen10

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. PCIe Slots (Slots 1-3 top to bottom, riser shipped standard) 3. PCIe Slots (Slots 7-8 top to bottom), requires tertiary riser card and second processor, Not available with 4x Flex Slot power supplies 5. Power supply power LED 7. Power supply power connection 9. HPE Flexible Slot Power Supply bay 2 (800W PS shown) 11. Dedicated iLO connector 13. USB connectors 2.0 (2) 15. Unit ID LED | <ol style="list-style-type: none"> 2. PCIe Slots (Slots 4-6 top to bottom, requires second riser card and second processor) 4. Power supply power connection 6. HPE Flexible Slot Power Supply bay 1 (800W PS shown) 8. Power supply power LED 10. Serial connector 12. VGA (video) connector 14. USB connectors 3.0 (2) 16. FlexibleLOM ports (Port 1 on right side) |
|---|---|

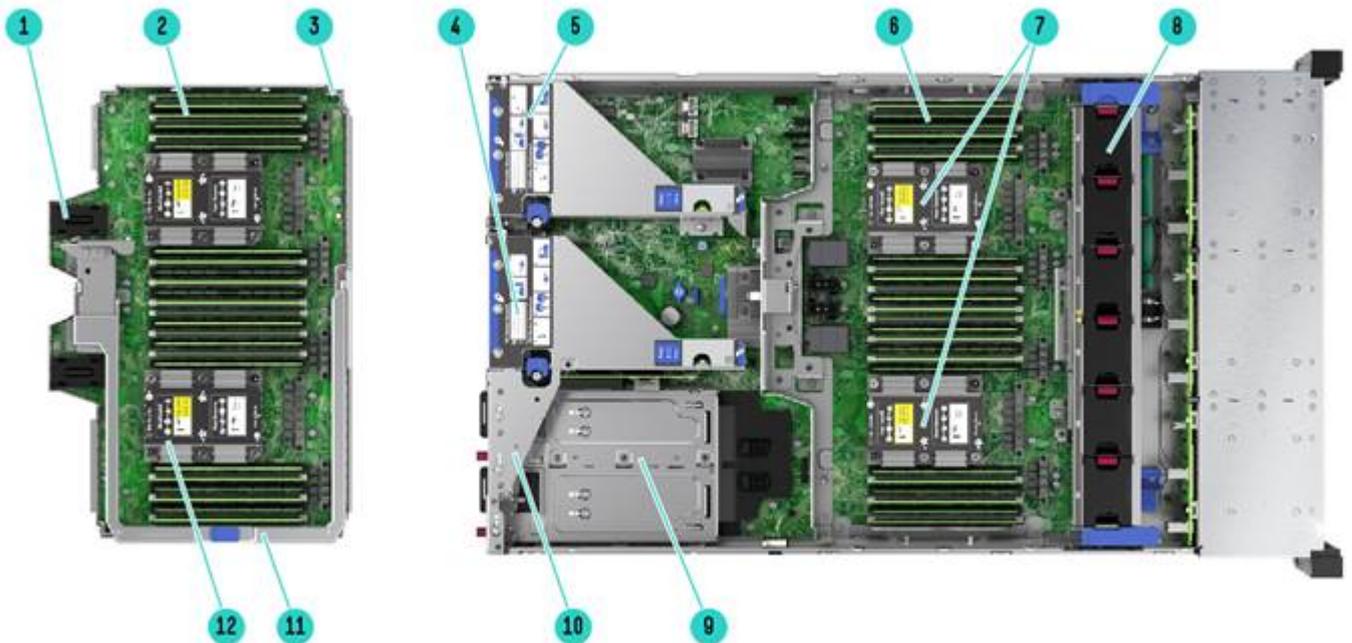

Overview

Internal View: DL560 Gen10 with upper CPU mezzanine tray

1. Left connector used for DL560 4-port NVMe Mezzanine card (Daughter card)
 2. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor)
 3. Upper CPU Mezzanine Board Kit
 4. Optional secondary PCIe riser
 5. Default primary PCIe riser
 6. DDR4 DIMM slots on upper CPU mezzanine board kit. Shown fully populated in 24 slots (12 per processor)
 7. 2 Processors, heatsink showing
 8. Fan cage shown with 6 standard Hot-plug fans
 9. (Under) Hot Plug redundant HPE Flexible Slot Power supplies
 10. Optional Tertiary riser
 11. Handle for removing upper CPU Mezzanine Board Kit
 12. 2 Processors, heatsink showing on upper CPU mezzanine board kit
-

What's New

- Support for the Intel® Xeon® Processor Scalable Family supporting up to 4 processors with core count ranging from 4 to 28 per processor
- Support for up to 12 NVMe drives
- Up to 3 TB of 2666 MT/s HPE DDR4 Smart Memory modules for increased performance for data-intensive application workloads
- HPE innovation with Intelligent System Tuning
- Supports up to 4 Flex Slot power supplies with 96% efficiency

Platform Information

Platform Information

Form Factor	2U Rack Form Factor Entry, Base and Performance pre-configured models ship with Gen10 Easy Install Rail Kits and Cable Management Assembly
Chassis Types	24 SFF with optional Universal Media Bay NOTE: The Universal Media Bay (872267-B21) is not available with the 24 SFF front end, and can only be populated in Box 1. NOTE: The 8 SFF can be upgraded with a drive cage to 16 or 24 SFF with field upgrades. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated for a field upgrade to 24 SFF. NOTE: All pre-configured models come with embedded software RAID support for 10 SATA drives. Optional HPE Smart Array Controllers can be added.
System Fans	6 Hot Plug Fans (with N+1 redundancy) NOTE: 6 hot plug fans are shipped as standard.

Standard Features

Processors

One, two or four of the following depending on model.

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4 MT/s	Memory per socket
Platinum Processors							
Platinum 8180M Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8180 Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8176M Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8176 Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8170M Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8170 Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8168 Processor	2.7 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8164 Processor	2.0 GHz	26	35.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8160M Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8160 Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8158 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8156 Processor	3.6 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8153 Processor	2.0 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold Processors							
Gold 6154 Processor	3.0 GHz	18	24.75 MB	200W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6152 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6150 Processor	2.7 GHz	18	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6148 Processor	2.4 GHz	20	27.50 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6142M Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6142 Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6140M Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6140 Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6138 Processor	2.0 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6136 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB

Standard Features

Gold 6134M Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6134 Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6132 Processor	2.6 GHz	14	19.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6130 Processor	2.1 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6128 Processor	3.4 GHz	6	19.25 MB	115W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6126 Processor	2.6 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5122 Processor	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5120 Processor	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5118 Processor	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5115 Processor	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768 GB

NOTE: Platinum - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology

Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Gold - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: All processors with power above 130W ship with a high performance heatsink

NOTE: 61xx and 81xx processors support 3 UPI links and all processors are connected in a cross bar configuration with each processor connected to another directly in a four processor system. 51xx processors support 2 UPI links only and all processors are connected in a ring configuration with processors 1, 3 and 2, 4 not connected directly in a four processor system.

Chipset

Intel C621 Chipset

NOTE: For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

On System Management Chipset

HPE iLO 5 ASIC

NOTE: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type:	SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)
DIMM Slots Available	48 12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel
Maximum capacity (LRDIMM)	3 TB 48 x 64 GB LRDIMM @ 2666 MT/s
Maximum capacity (RDIMM)	1.5 TB 48 x 32 GB RDIMM @ 2666 MT/s

Standard Features

NOTE: Mixing of RDIMM and LRDIMM memory is not supported.

NOTE: Memory speed depends on the processor selected.

Memory Protection

For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>.

Expansion Slots

Primary Riser (Standard)	Expansion Slots #	Technology	Bus/Connector Width	Form Factor/Connector	Notes
	1	PCIe 3.0	x8	¾ length/full height	Proc 1
	2	PCIe 3.0	X16	¾ length/full height	Proc 1
	3	PCIe 3.0	x8	¾ length/full height	Proc 1
	None	2 x M.2	SATA lanes	M.2	Chipset

Primary/Secondary Riser (Optional) 826704-B21	Expansion Slots (Primary/Secondary) #	Technology	Bus/Connector Width	Form Factor/Connector (Primary)	Form Factor/Connector (Secondary)	Notes (Primary/secondary)
	2/5	PCIe 3.0	x16	¾ length/full height	Half length/full height	Proc 1/2
	3/6	PCIe 3.0	x16	¾ length/full height	Half length/full height	Proc 1/2

Primary/Secondary Riser (Optional) 826704-B21	Expansion Slots (Primary/Secondary) #	Technology	Bus/Connector Width	Form Factor/Connector	Notes (P)
	None	NVMe	x8	Slimline	
	None	NVMe	x8	Slimline	
	None	NVMe	x8	Slimline	
	None	NVMe	x8	Slimline	

Primary/Secondary Riser (Optional) 826704-B21	Expansion Slots (Primary/Secondary)#	Technology	Bus/Connector Width	Form Factor/Connector (Primary)	Form Factor/Connector (Secondary)
	1/4	PCIe 3.0	x8	¾ length/full height	Half length/full height
	2/5	PCIe 3.0	x8	¾ length/full height	Half length/full height
	3/6	PCIe 3.0	x8	¾ length/full height	Half length/full height
	None	NVMe	x8	Slimline	Slimline

Secondary Riser	Expansion	Technology	Bus Width	Form Factor
-----------------	-----------	------------	-----------	-------------

Standard Features

(Optional) 870548-B21	Slots #			
	4	PCIe 3.0	x8	Half length/full height
	5	PCIe 3.0	x16	Half length/full height
	6	PCIe 3.0	x8	Half length/full height
Tertiary riser (Optional) 872253-B21	Expansion Slots #	Technology	Bus Width	Form Factor
	7	PCIe 3.0	x8	Half length/full height
	8	PCIe 3.0	x8	Half length/full height
Tertiary riser (Optional) 872255-B21	Expansion Slots #	Technology	Bus Width	Form Factor/Connector
	7	PCIe 3.0	x8	Half length/full height
	None	NVMe	x8	Slimline
Tertiary riser (Optional) 872257-B21	Expansion Slots #	Technology	Bus Width	Form Factor/Connector
	None	NVMe	x8	Slimline
	None	NVMe	x8	Slimline
4-port NVMe Mezzanine card (Optional) 874633-B21	Expansion Slots #	Technology	Bus Width	Form Factor/Connector
	None	NVMe	x8	Slimline
	None	NVMe	x8	Slimline
	None	NVMe	x8	Slimline
	None	NVMe	x8	Slimline

NOTE: The secondary and tertiary risers need the 2nd processor to be installed.

NOTE: The expansion slots at the back are numbered in ascending order from top to bottom and from left to right.

NOTE: Some riser kits (826704-B21, 873418-B21, 873420-B21) have FIO options with separate numbers and their own riser cages. Please review the FIO section for details.

NOTE: The optional 4-port NVMe Mezzanine card 874633-B21 supports a maximum of 8 NVMe drives and does not require a dedicated slot. It goes on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and requires a four processor server.

NOTE: The tertiary risers can only be installed when using two PSUs. There is no space for tertiary risers when two secondary risers are installed. If a secondary riser is required it needs to be ordered separately. Please refer section HPE I/O Expansion for details.

NOTE: A maximum of 1 primary, 1 secondary and 1 tertiary riser can be installed in one server.

NOTE: Slimline riser kit (873418-B21) does not contain any additional PCIe slots.

Network Controller

The HPE ProLiant DL560 Gen10 servers offer a flexible network technology - FlexibleLOMs, which offers custom configurations of 10 Gb, 25 Gb or 10 Gb base-T Ethernet or converged networking in their embedded adapter. A range of NIC cards are available to enhance networking capabilities.

NOTE: For additional details see the Networking Section of this document.

Standard Features

Model

Entry Model

Base Model

Performance Model

Adapter

HPE Ethernet 1Gb 4-port 331FLR Adapter

HPE FlexFabric 10Gb 2P 533FLR-T Adapter

HPE FlexFabric 10/25 Gb 2P 640FLR-SFP28 Adapter or HPE FlexFabric 10/25 Gb 2P 640FLR-SFP28 Adapter

Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more complete list of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

Software RAID

HPE Smart Array S100i SR Gen10 SW RAID

NOTE: HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional adapter may be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please refer to the [Enable Smart Array SW RAID \(784308-B21\)](#).

Essential RAID

HPE Smart Array E208i-a SR G10 LH Controller

HPE Smart Array E208i-p SR Gen10 Controller

HPE Smart Array E208e-p SR Gen10 Controller

Performance RAID

HPE Smart Array P408i-a SR G10 LH Controller

HPE Smart Array P408i-p SR Gen10 Controller

HPE Smart Array P408e-p SR Gen10 Controller

HPE Smart Array P816i-a SR G10 LH Controller

Internal Storage Devices

One of the following depending on model

Optical Drive

Optional: DVD-ROM, DVD-RW

Hard Drives

None ship standard

Hard Drive Bays

8 hot plug SFF SAS/SATA HDD Bays in Entry and Base Models

16 hot plug SFF SAS/SATA HDD Bays in Performance Models

NOTE: Box 3 is populated by 8 SFF SAS/SATA bay and shipped as default.

NOTE: The 8 NVMe drive option can only be placed in Bay 2.

NOTE: The Universal Media Bay (872267-B21) not available with the 24 SFF HDD option. The Universal Media Bay can only be populated in Box 1.

NOTE: The 8 SFF can be upgraded with a drive cage to 16 or 24 SFF with the 24 SFF option. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated. For field upgrade to 24 SFF.

NOTE: A maximum of 12 NVMe drives can be supported with 2 NVMe drives in Bay 2 and 2 NVMe drives in Bay 3.

NOTE: All pre-configured models come with embedded software RAID support. Optional HPE Smart Array Controllers can be added.

Maximum Internal Storage

	CAPACITY	CONFIGURATION
Hot Plug SFF SATA HDD	48 TB	24 x 2 TB
Hot Plug SFF SAS HDD	48 TB	24 x 2 TB
Hot Plug SFF SATA SSD	92 TB	24 x 3.84 TB
Hot Plug SFF SAS SSD	92 TB	24 x 3.84 TB

Standard Features

SFF NVMe SSD

24 TB

12 x 2 TB

Power Supply

One of the following depending on model

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% and 96% efficiency.

NOTE: Also available in -48VDC and 227VAC/380VDC power inputs.

NOTE: Must order 4x800W Flex Slot PSU.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% efficiency.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug installation into HPE ProLiant Gen10 Servers. Flex Slot power supplies are certified for high-efficiency operation at multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility reduces power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (416151-B21). This jumper cord is included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cords](#) page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

Interfaces

Serial 1 rear

Video 1 front (optional with Universal Media Bay), 1 rear

HPE iLO Remote Management Network Port 1

HPE iLO Front Service Port 1

Micro SD Slot 1 (Internal), 2 (optional, internal)

NOTE: Requires the optional HPE Dual Micro SD 8GB USB kit.

USB 2.0 Ports 4 total: 2 front (optional); 2 rear

USB 3.0 Ports 5 total: 1 front; 2 rear, 2 internal

NOTE: 2 front (optional) USB 2.0 ports need the HPE DL560 Gen10 Universal Media Bay Kit (872267-B21).

Operating Systems and Virtualization Software Support for ProLiant Servers

[Windows Server 2012 R2](#)

[Windows Server 2016](#)

[VMware ESXi 6.0 U3](#)

[VMware ESXi 6.5 and U1 upon release](#)

[Red Hat Enterprise Linux \(RHEL\) 6.9 and 7.3](#)

[SUSE Linux Enterprise Server \(SLES\) 11 SP4 and 12 SP2](#)

[CentOS 6.9 and 7.3](#)

NOTE: Not directly supported / Community Supported (Based on RHEL so RHEL testing and enablement applicable to CentOS 6.9 / CentOS 7.3).

NOTE: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<http://h20566.www2.hpe.com/portal/site/hpsc/public/psi/home?sp4ts.oid=1010026837>.

Industry Standard Compliance

ACPI 6.1 Compliant

Standard Features

- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant (internal); USB 2.0 Compliant (external ports via SUV)
- SMBIOS 3.1
- UEFI 2.6
- Redfish API

NOTE: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit <http://www.hpe.com/servers/ashrae>.

Graphics

- Integrated Video Standard
- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR 3 with ECC protection

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have implemented and support both UEFI Mode (default) and Legacy BIOS Mode.

NOTE: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled
- iSCSI Software Initiator Support
- HTTP/HTTPS Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI boot.
NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for the HPE ProLiant DL560 Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and more with HPE iLO. Learn more at <http://www.hpe.com/info/iLO>.

Standard Features

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management interface that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs, troubleshoot, and problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant. Learn more at <http://www.hpe.com/info/smartupdate>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that discovers, inventories and updates Gen8, Gen9 and Gen10 HPE servers at unmatched scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere using smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/ilo/rest>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with iLO Scripting Tools (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/stk> or <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and configuration management, with no additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for other server types. HPE SIM also integrates with Smart Update Manager to provide quick firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Standard Features

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes including a New iLO Advance Premium Security Edition License
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates - components digitally signed and verified
- Secure Recovery - recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 1.2 option
- TPM (Trusted Platform Module) 2.0 option Bezel Locking Kit
- Chassis Intrusion detection option

NOTE: HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode and no BIOS. The Trusted Platform Module 2.0 Option can be configured to the 1.2 version through the UEFI BIOS to support TCG 1.2 functionality.

NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with another TPM module.

About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA key pairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

HPE supports two version of TPM, the 1.2 device and the 2.0 device. The TPM 2.0 device works with Gen10 servers that are using a Linux operating system or Microsoft Windows Server 2016. Both TPM 1.2 and 2.0 are compatible with HPE ProLiant Gen9 and Gen10 servers. These TPM modules are not compatible with server generations prior to Gen9. Once the TPM module is installed, it locks into place and cannot be removed, nor can it be replaced with a different TPM device.

HPE Silicon Root of Trust

HPE's Silicon Root of Trust provides protection because as soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run, before the operating system starts, making it essential to confirm that all server essential firmware is free from malware or compromised code.

Silicon Root of Trust is included with iLO5 Standard with all platforms that contain the iLO5 chip. That includes ML, DL, Apollo, C-Class Blades, and Synergy Compute Modules. HPE Cloudline and the HPE

Standard Features

Microserver do not have silicon root of trust, since they do not contain an iLO5 silicon chip. This technology is NOT available on any previous version of HP ProLiant like the Gen9, Gen8, or Gen 7 servers, nor can those previous generations be retrofitted to accommodate the silicon root of trust.

The silicon validates the iLO 5 firmware code before it is fetched and executed. If any malware or compromised code has been inserted in the iLO 5 firmware, the silicon will detect that, because any infected firmware code will not match-up with the hash burned into the silicon. From there, the iLO 5 firmware validates the rest of the server firmware, namely the UEFI, CPLD, IE, and ME. The UEFI then validates the connection to the operating system, thus completing a complete root, or chain, that is anchored into the silicon.

During operation of the server, HPE has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has occurred.

In the unlikely event of a breach into the HPE server firmware, after detection has been completed, the customer may then securely recover the firmware automatically to a previous known good state. HPE provides this function through a new HPE license called, HPE iLO Advanced Premium Security Edition.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

HPE Insight Control

HPE Insight Control is recommended for current implementation on HPE Servers to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <http://www.hpe.com/info/insightcontrol>.

GPGPU Information

HPE NVIDIA Quadro P2000 Graphics Accelerator

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

Optional Features

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Service and Support

HPE Pointnext

Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Reduce down time and improve diagnostic accuracy with a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE

Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

Learn more about getting connected at <http://www.hpe.com/services/getconnected>

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers. Learn more <http://www.hpe.com/support/hpesc>

HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

Pre-configured Models

	Entry Models		Base Models
SKU Number	840369-B21	875807-B21	840370-B21
Model Name	HPE DL560 Gen10 5120 32GB 2P Entry Svr	HPE DL560 Gen10 6130 64GB 2P Entry 2 Svr	HPE DL560 Gen10 6148 128GB 4P Base Svr
Processor	Intel® Xeon® 5120	Intel® Xeon® 6130	Intel® Xeon® 6148
Number of Processors	2	2	4
Memory	32 GB (2x16GB Registered DIMMs, 2666 MT/s) NOTE: 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	64 GB (4x16GB Registered DIMMs, 2666 MT/s) NOTE: 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	128 GB (8x16GB Registered DIMMs, 2666 MT/s)
Network Controller	1 Gb 4-port 331FLR Adapter	10GbE FlexFabric 2-port 533FLR-T Adapter	10GbE FlexFabric 2-port 533FLR-T Adapter
Storage Controller	HPE Smart Array S100i Software RAID NOTE: Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC).	HPE Smart Array P408i-a NOTE: Additional storage controllers are available as options.	HPE Smart Array P408i-a NOTE: Additional storage controllers are available as options.
Power Supply	1x 1600W	2x 1600W	2x 1600W
PCI-Express Slots	3 PCIe 3.0 slots available NOTE: 8 PCIe 3.0 slots available with the secondary and tertiary riser installed.	3 PCIe 3.0 slots available NOTE: 8 PCIe 3.0 slots available with the secondary and tertiary riser installed.	6 PCIe 3.0 slots available NOTE: 8 PCIe 3.0 slots available with the tertiary riser installed.
Hard Drive	None ship standard		
Internal Storage	8 SFF Drive Bays NOTE: Can be expanded up to a max of 24 SFF drives, with optional HPE DL560 Gen10 8SFF HDD Bay2 Kit (872235-B21) and HPE DL560 Gen10 8 SFF HDD Bay1 Kit (872231-B21). NOTE: Optionally NVMe SSD drives can be added with HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8 SFF Bay1 Kit (872227-B21) or HPE DL560 Gen10 Prem 6 SFF+2 NVMe Bay2 Kit(872229-B21) or HPE DL560 Gen10 Premium 6 SFF and 2 NVMe or 8 SFF Bay3 Kit (872231-B21) or HPE DL560 NVMe 8 SSD Express Bay Enablement Kit (872225-B21). NOTE: Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit.		
Optical Drive Bay	Optional via Universal Media Bay		
Optical Drive	Optional via Universal Media Bay		
Fans	6 hot plug fans, redundant		
Management	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, Insight Control and HPE OneView Advanced (require licenses)		

Pre-configured Models

Form Factor	Rack (2U), HPE Easy Install Rails with CMA
Warranty	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

Performance Models	
SKU Number	840371-B21
Model Name	HPE DL560 Gen10 8170 256GB 4P Adv Svr
Processor	Intel® Xeon® 8170
Number of Processors	4
Memory	256 GB (8x 16 GB Registered DIMMs, 2666 MT/s)
Network Controller	10/25Gb2p 640FLR-SFP28 Adapter
Storage Controller	Smart Array P816i-a
PCI-Express Slots	8 PCIe 3.0 slots available
Power Supply	2x 1600W
Hard Drive	None ship standard
Internal Storage	8 SFF Drive Bays
Optical Drive Bay	None ship standard. optional via Universal Media Bay
Optical Drive	None ship standard. optional via Universal Media Bay
Fans	6 hot plug fans, redundant
Management	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced (included), HPE iLO Advanced Premium Security Edition (require licenses), Insight Control (require licenses) and HPE OneView Advanced (included)
Form Factor	Rack (2U), HPE Easy Install Rails with CMA
Warranty	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

NOTE: UEFI is the standard default for all pre-defined models.

Country Code Key xx1 = B21

Worldwide

NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

xx1 = 291

Japan

xx1 = AA1

PRC

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

Server description	HPE DL560 Gen10 CTO Svr
SKU Number	841730-B21
TAA SKU	875797-B21
Chipset	Intel® C621 Chipset
Processor	2U Server Chassis with 2 processor slots available; 4 processor configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21)
DIMM Slots	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory; 48 DIMM configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and 4 processors
Network Controller	None. FlexibleLOM slot (various options can be chosen for networking; NIC cards also available via expansion slots)
Storage Controller	HPE Smart Array S100i NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).
PCIe	3 PCIe 3.0 slots (8 PCIe 3.0 slots are available if second processor is chosen and a Secondary and Tertiary Riser Kits has been installed)
Drive Cage - included	8 SFF, no drives
Fans	6 hot plug fans, redundant
Management	HPE iLO Standard with Intelligent Provisioning and (Standard); HPE OneView Standard (requires download) and HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, Insight Control, HPE OneView Advanced (require additional licenses)
microSD Slots	1 microSD card slot (internal)
TPM Connector	1 Trusted Platform Module (TPM) connector
UEFI	BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default)
USB	7 USB ports (2 USB 2.0 and 5 USB 3.0)
Video Ports	2 video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear)
Rails	Easy install rails and cable management arm are optional

NOTE: Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.

NOTE: PCIe slot availability is dependent on the number of processors and riser kits installed. Please refer to the "Expansion slots" section for more details.

NOTE: For the DL560 Gen10, the number of processors can be one, two or four installed. For four processors, the HPE DL5x0 Gen10 CPU Mezzanine Board Kit is required.

Configuration Information - Factory Integrated Models

NOTE: This applies to CTO configurations, field upgrades may differ depending on field configuration.

Step 2a: Choose Processor Options

Processor Option Kits	Required Processor
HPE DL560 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	875335-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	872766-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	875336-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	840379-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	875337-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	870730-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	872768-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	840383-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8160M (2.1GHz/24-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	875338-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	840381-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/105W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	840397-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) FIO Processor Kit	840395-L21
HPE DL560 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) FIO Processor Kit	872841-L21
HPE DL560 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	872770-L21
HPE DL560 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/135W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	840387-L21

Configuration Information - Factory Integrated Models

HPE DL560 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) FIO Processor Kit	870732-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/145W) FIO Processor Kit	840385-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) FIO Processor Kit	875342-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) FIO Processor Kit	872828-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/135W) FIO Processor Kit	875339-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/135W) FIO Processor Kit	840389-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/120W) FIO Processor Kit	872835-L21
HPE DL560 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit	872831-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) FIO Processor Kit	875343-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) FIO Processor Kit	872833-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit	840391-L21
NOTE: Ships with Performance Heatsink.	
HPE DL560 Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/120W) FIO Processor Kit	840393-L21
HPE DL560 Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit	872839-L21
HPE DL560 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/120W) FIO Processor Kit	870734-L21
HPE DL560 Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit	870736-L21
HPE DL560 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit	870738-L21
HPE DL560 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit	840399-L21
HPE DL560 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit	875349-L21

NOTE: If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

Step 2b: Choose Memory Options

Configuration Information - Factory Integrated Models

Only one of the following from each list unless otherwise noted

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815097-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815098-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815100-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Memory Kit	815101-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	835955-B21

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

Step 2c: Choose Power Supplies

Only one or more of the following from each list unless otherwise noted

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21

NOTE: Select one or more power supplies. For 800W, 4 power supplies need to be selected

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>.

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

Step 2d: Choose network adapters

Only one of the following from each list unless otherwise noted

HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 FIO Adapter	817710-B21
HPE FlexFabric 10Gb 4-port 536FLR-T FIO Adapter	764303-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ FIO Adapter	700752-B21
HPE Ethernet 10Gb 2-port 535FLR-T FIO Adapter	817722-B21
HPE Ethernet 1Gb 4-port 331FLR FIO Adapter	684208-B21
HP FlexFabric 10Gb 2-port 533FLR-T FIO Adapter	700760-B21
HP Ethernet 10Gb 2-port 562FLR-SFP+ FIO Adapter	789006-B21
HPE Ethernet 1Gb 4-port 366FLR FIO Adapter	684217-B21
HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 FIO Adapter	817750-B21

Step 3: Choose Additional Factory Integratable Options

Only one of the following from each list unless otherwise noted

Risers

HPE DL560 Gen10 4-port 8 NVMe Slimline FIO Riser Kit	876242-B21
HPE DL560 Gen10 x8/x8/x8 1-port 2 NVMe Slimline FIO Riser Kit	876245-B21
HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit	871676-B21

HPE OneView

Configuration Information - Factory Integrated Models

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

BIOS Mode

HP Legacy FIO Mode Setting	758959-B22
----------------------------	------------

NOTE: Selecting this option will change the UEFI BIOS setting into Legacy BIOS Setting.

Controller State

HP FIO Enable Smart Array B140i Setting	784308-B21
---	------------

NOTE: If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The S100i does not support SAS hard drives.

Step 4: Choose Additional Options for Factory Integration from Core and additional Options sections below

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

HPE DL5x0 Gen10 12Gb SAS Expander Card Kit with Cables	873444-B21
HPE DL560 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit	872223-B21

NOTE: Needs to be ordered with the HPE DL560 Gen10 Uni Media Bay Kit (872267-B21).

HPE DL560 NVMe 8 SSD Express Bay Enablement Kit	872225-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay1 Kit	872227-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay2 Kit	872229-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay3 Kit	872231-B21
HPE DL560 Gen10 4-port NVMe Mezzanine Card	874633-B21
HPE DL560 Gen10 8SFF HDD Bay1 Kit	872233-B21
HPE DL560 Gen10 8SFF HDD Bay2 Kit	872235-B21
HPE DL560 Gen10 8SFF HDD Bay3 Kit	872237-B21
HPE DL560 Gen10 Universal Media Bay Kit	872267-B21

NOTE: An optional Optical Disk Drive can be added, either DVD-ROM (726536-B21) or DVD-RW (726537-B21).

HPE DL5x0 Gen10 System Insight Display Kit	872261-B21
HPE DL560 Gen10 4x Power Supply Enablement Kit	875675-B21

NOTE: Must be ordered when selecting 4 power supplies.

HPE DL5x0 Gen10 CPU Mezzanine Board Kit	872222-B21
HPE DL5x0 Gen10 CPU Mezzanine Board Kit	875608-B21

NOTE: The HPE DL5x0 Gen10 CPU Mezz Kit (872222-B21) is needed for four processor configurations.

NOTE: The HPE DL5x0 Gen10 CPU Mezz Perf Kit (875608-B21) can only be used in a two processor configuration. This kit ships with the mezzanine tray and connects the two processors with 3 UPI (2 UPI links for 51xx processors) links.

NOTE: The HPE DL560 Gen10 8 SFF Bay 3 Cage/Backplane Kit (872237-B21) is shipped default with the server. The priority order of drive box population is Box 3, followed by Box 2 and then Box 1.

HPE Processors

HPE DL560 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit	875335-B21
--	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) Processor Kit	872766-B21
---	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) Processor Kit	875336-B21
--	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) Processor Kit	840379-B21
---	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) Processor Kit	875337-B21
--	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) Processor Kit	870730-B21
---	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) Processor Kit	872768-B21
---	------------

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit	840383-B21
---	------------

Core Options

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon® -Platinum 8160M (2.1GHz/24-core/145W) Processor Kit 875338-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/145W) Processor Kit 840381-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/105W) Processor Kit 840397-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) Processor Kit 840395-B21

HPE DL560 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit 872841-B21

HPE DL560 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) Processor Kit 872770-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/135W) Processor Kit 840387-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) Processor Kit 870732-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/145W) Processor Kit 840385-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) Processor Kit 875342-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) Processor Kit 872828-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/140W) Processor Kit 875339-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit 840389-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit 872835-B21

HPE DL560 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit 872831-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) Processor Kit 875343-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) Processor Kit 872833-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit 840391-B21

NOTE: Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit 840393-B21

HPE DL560 Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit 872839-B21

HPE DL560 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit 870734-B21

HPE DL560 Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit 870736-B21

HPE DL560 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit 870738-B21

HPE DL560 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit 840399-B21

HPE DL560 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit 875349-B21

NOTE: If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

Memory Selection

Core Options

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends memory from the list located here:

<http://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

HPE Memory

NOTE: Hewlett Packard Enterprise memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server.

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815097-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815098-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815100-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Memory Kit	815101-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	835955-B21

NOTE: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

HPE Optical Drives

HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit (872267-B21)).	
HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21
NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit - 872267-B21).	
HP Mobile USB Non Leaded System DVD RW Drive	701498-B21
NOTE: External	

HPE Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21

Core Options

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21

Midline - 12G SAS - SFF Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	832514-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765464-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21

Midline - 6G SATA - SFF Drives

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765453-B21
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765455-B21

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here:

<http://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

To further assist with configuration, HPE also offers an SSD Selector Tool located here:

<http://ssd.hpe.com>.

Write Intensive - PCIe/NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736936-B21
HPE 800GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736939-B21
HPE 1.6TB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	764892-B21
HPE 2TB NVMe x4 Lanes Write Intensive SFF(2.5in) SCN 3yr Wty SSD	764894-B21

Write Intensive - 6G SATA - SFF - Solid State Drives

HPE 400GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872355-B21
HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872359-B21
HPE 1.6TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872363-B21

Read Intensive - 6G SATA - SFF - Solid State Drives

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868814-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868818-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868822-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868826-B21
HPE 3.8TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868830-B21

Read Intensive - 12G SAS - SFF - Solid State Drives

Core Options

HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872390-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872392-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872394-B21

Read Intensive - 6G SATA - M.2 - UFF - Solid State Drives

HPE 340GB SATA 6G Read Intensive UFF 3yr Wty Dual M.2 Kit	815605-B21
HPE 340GB SATA 6G Read Intensive UFF 3yr Wty M.2 Kit	815606-B21

NOTE: M.2 drives go in the Primary Riser and use S100i SATA controller only.

NOTE: M.2 supports Software RAID only.

Read Intensive - NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764904-B21
HPE 1.2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764906-B21

NOTE: A NVMe (872225-B21 or 872227-B21 or 872229-B21, 872231-B21) or Premium (872223-B21) drive cage are required to support these drives in conjunction with a NVMe riser kit or 4-port NVMe Mezzanine card .

NOTE: Not supported by HPE Smart Array controllers.

Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872374-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872376-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872382-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872386-B21

Mixed Use - 6G SATA - SFF - Solid State Drives

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21

Mixed Use - NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765034-B21
HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765036-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765038-B21
HPE 2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765044-B21

NOTE: A NVMe (872225-B21 or 872227-B21 or 872229-B21, 872231-B21) or Premium (872223-B21) drive cage are required to support these drives in conjunction with a NVMe riser kit.

NOTE: Not supported by HPE Smart Array controllers.

Hard Drive Blank Kits

HPE Small Form Factor Hard Drive Blank Kit	666987-B21
--	------------

Hard Drive Kits

HPE DL560 Gen10 8SFF HDD Bay1 Kit	872233-B21
HPE DL560 Gen10 8SFF HDD Bay2 Kit	872235-B21
HPE DL560 Gen10 8SFF HDD Bay3 Kit	872237-B21

NVMe Kit

HPE DL560 NVMe 8 SSD Express Bay Enablement Kit	872225-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay1 Kit	872227-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay2 Kit	872229-B21
HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay3 Kit	872231-B21

Media Bay Kits

Core Options

HPE DL560 Gen10 Universal Media Bay Kit	872267-B21
HPE DL560 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit	872223-B21

HPE Networking

25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter	817753-B21
HPE Ethernet 4x25Gb 1-port 620QSFP28 Adapter	817762-B21
HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter	817709-B21
HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter	817718-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HPE Ethernet 10Gb 2-port 530T Adapter	656596-B21
HPE Ethernet 10Gb 2-port 535T Adapter	813661-B21
HPE Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21
HPE Ethernet 1Gb 2-port 332T Adapter	615732-B21
HPE Ethernet 1Gb 2-port 361T Adapter	652497-B21
HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter	817721-B21
HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter	764302-B21

NOTE: Please see the NIC QuickSpecs for Technical Specifications and additional information: <https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

HPE InfiniBand

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21
HPE 100Gb 1-port OP101 QSFP28 x8 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829334-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829335-B21

Core Options

NOTE: For additional InfiniBand information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

HPE I/O Expansion Options

HPE DL560 Gen10 x8/x8/x8 1-port 2 NVMe Slimline Riser Kit	873420-B21
HPE DL560 Gen10 4-port 8 NVMe Slimline Riser Kit	873418-B21
HPE DL560 Gen10 x8/x8 Tertiary Riser Kit	872253-B21
HPE DL Gen10 x16/x16 GPU Riser Kit	826704-B21
HPE DL Gen10 x8/x16/x8 Riser Kit	870548-B21
HPE DL560 Gen10 x8 2-port 4 NVMe Slimline Riser Kit	872255-B21
HPE DL560 Gen10 2-port 4 NVMe Slimline Tertiary Riser Kit	872257-B21

NOTE: Secondary and Tertiary risers are optional kits which can be utilized when system is populated with at least two (2) processors. Refer to “Expansion Slots” section for additional details on risers.

HPE Power Supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
--	------------

NOTE: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
---	------------

NOTE: Flex Slot -48VDC power supplies support power efficiency of up to 94%.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
---	------------

NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
--	------------

NOTE: Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
---	------------

NOTE: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: Option kits contain the specified power supply and a PDU IEC cable.

NOTE: 1600W power supplies only support high line voltage.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.

Core Options

GPGPU information

Part number	Card	Qty support	Processor support	PCIe speed	8/16/24 SFF	Max. 8 NVMe	Greater than 8 NVMe
Q0V77A	NVIDIA Quadro P2000 GPU Module	2	All	Gen3	35C	35C	30C

NOTE: Check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

NOTE: A maximum of 2 GPU cards can be supported, 1 in primary riser expansion slot 2 and another in secondary riser expansion slot 5. Refer Expansion Slots sections for additional details on risers.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

iLO Advanced

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU	BD505A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD506A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Tracking LTU	BD507A
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU	512485-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity LTU	512486-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking LTU	512487-B21

HPE Converged Infrastructure Management Software

HPE OneView Physical Media Kit LTU	E5Y37A
------------------------------------	--------

HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A

NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning.

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.

NOTE: Electronic and flexible-quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Please see the [HPE OneView QuickSpecs](#) for technical specifications and additional information.

HPE PCIe Workload Accelerator Options

HPE Write Intensive PCIe Workload Accelerator

HPE 1.6TB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803197-B21
HPE 800GB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803195-B21

HPE Mixed Use PCIe Workload Accelerator

HPE 2.0TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803204-B21
HPE 1.6TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803202-B21
HPE 800GB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803200-B21

Additional Options

NOTE: Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.


HPE Security

HPE Trusted Platform Module 2.0 Kit	864279-B21
HPE iLO Adv Security Upg Elc Lic 3yr Sup	Q7E12AAE
HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features	Q7E31A
HPE iLO Advanced Premium Security Flex Qty License with 1yr Support on Licensed Features	Q7E32A
HPE iLO Advanced Premium Security Edition Electronic License with 1yr Support on Licensed Features	Q7E32AAE
HPE iLO Advanced Premium Security Edition License with 3yr Support on Licensed Features	Q7E33A
HPE iLO Advanced Premium Security Flex Qty License with 3yr Support on Licensed Features	Q7E34A
HPE iLO Advanced Premium Security Edition Electronic License with 3yr Support on Licensed Features	Q7E34AAE
HPE iLO Advanced Premium Security AKA Tracking License with 1yr Support on Licensed Features	Q7E35A
HPE iLO Advanced Premium Security AKA Tracking License with 1yr Support on Licensed Features	Q7E36A

NOTE: HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen9 servers or earlier generation variants. HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

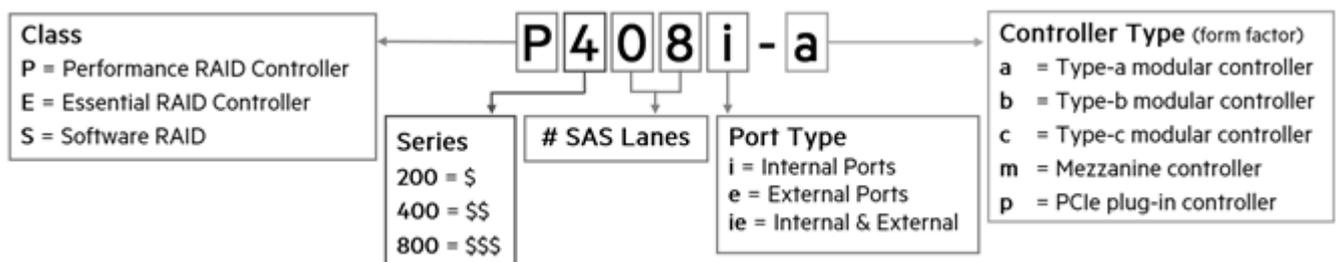

Performance RAID Controllers

NOTE: All performance RAID controllers are supported by the HPE Smart Storage Battery (875241-B21), which supports multiple devices and is sold separately.

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller	869083-B21
--	------------

NOTE: Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller	869081-B21
---	------------

Additional Options

NOTE: Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller 830824-B21

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller 804405-B21

Essential RAID Controllers

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller 869079-B21

NOTE: Does not occupy a PCIe expansion slot.

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804394-B21

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

Optional Software

HPE Smart Array Secure Encryption/Data at Rest Encryption/per Server Entitlement E-LTU Q2F26AAE

HPE SmartCache No Media 24x7 Technical Support 1-server LTU D7S26A

HPE SmartCache No Media 24x7 Technical Support Flexible LTU D7S27A

HPE SmartCache No Media 24x7 Technical Support E-LTU D7S27AAE

NOTE: SmartCache is offered on HPE Smart Array performance RAID controllers and comes standard (no licensing is required) if the HPE Smart Array P816i-a SR Gen10 LH Controller is installed in the server.

Optional Upgrades

HPE 96W Smart Storage Battery (up to 20 Devices/145mm Cable) Kit 875241-B21

NOTE: Provides backup power for multiple HPE Smart Array controllers or other devices. Is required with performance RAID controllers.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>. For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<http://www.hpe.com/storage/BURACompatibility>.

HPE Storage Options

Emulex Fibre Channel HBAs

HPE StoreFabric SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter Q0L13A

HPE StoreFabric SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter Q0L14A

HPE StoreFabric SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter Q0L11A

HPE StoreFabric SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter Q0L12A

QLogic Fibre Channel HBAs

HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter P9D93A

HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter P9D94A

HPE StoreFabric SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter P9M75A

HPE StoreFabric SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter P9M76A

Converged Network Adapter

HPE StoreFabric CN1100R Dual Port Converged Network Adapter QW990A

HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter N3U52A

Additional Options

HPE StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A
HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter	N3U51A

HPE Racks

NOTE: Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

NOTE: Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

NOTE: Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

NOTE: Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

NOTE: Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

NOTE: Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits

HP 2U Large Form Factor Easy Install Rail Kit	733662-B21
---	------------

NOTE: Does not include CMA (733664-B21).

HP 2U Cable Management Arm for Easy Install Rail Kit	733664-B21
--	------------

HPE 2U Large Form Factor Ball Bearing Rail Kit	720864-B21
--	------------

NOTE: Does not include CMA (720865-B21).

HPE 2U Cable Management Arm for Ball Bearing Rail Kit	720865-B21
---	------------

NOTE: Rail kits are optional for DL560 Gen10 and are no longer included standard with the server.

Customers have the option to purchase their server without a rail kit.

NOTE: Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

NOTE: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE USB and SD Options

Additional Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD Mainstream Flash Media Kit	700139-B21
HPE 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21


NOTE: Please see the [HPE Flash Media Kits QuickSpecs](#) for additional information.

Memory

Memory Population guidelines

HPE Gen10 DL360 / DL380 / DL560* Servers

2 Slots per Channel

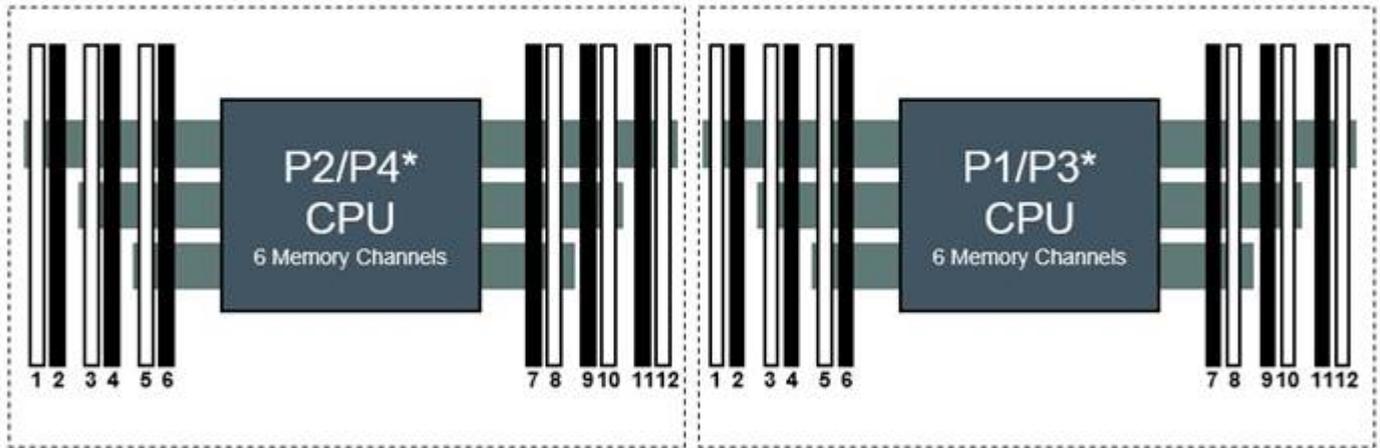

* DL560 is a 4 socket server (uses P3, P4)

Front of Server

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order												
1 DIMM									8			
2 DIMMs								8	10			
3 DIMMs								8	10	12		
4 DIMMs			3	5				8	10			
5 DIMMs ^			3	5				8	10	12		
6 DIMMs	1		3	5				8	10	12		
7 DIMMs ^	1		3	6		7	8	10	12			
8 DIMMs			3	4	6	6	7	8	9	10		
9 DIMMs ^	1		3	5		7	8	9	10	11	12	
10 DIMMs ^	1		3	4	5	6	7	8	9	10		12
11 DIMMs ^	1		3	4	5	6	7	8	9	10	11	12
12 DIMMs	1	2	3	4	6	6	7	8	9	10	11	12

^ Unbalanced, not recommended

General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.

Memory

- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).

Memory Speed Table				
500 Series Platforms - DL560 Gen 10				
DIMM Type	Register DIMM (RDIMM)			
HPE SKU P/N	815097-B21	815098-B21	835955-B21	815100-B21
SKU Description	HPE 8GB 1Rx8 PC4-2666V-R Kit	HPE 16GB 1Rx4 PC4-2666V-R Kit	HPE 16GB 2Rx8 PC4-2666V-R Kit	HPE 32GB 2Rx4 PC4-2666V-R Kit
DIMM Rank ->	Single Rank (1R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
DIMM Capacity ->	8 GB	16 GB	16 GB	32 GB
Voltage	1.2V	1.2V	1.2V	1.2V
DRAM depth [bit]	1G	2G	1G	2G
DRAM Width [bit]	x8	x4	x8	x4
DRAM Density	8 Gb	8 Gb	8 Gb	8 Gb
CAS Latency	19-19-19	19-19-19	19-19-19	19-19-19
DIMM Native Speed (MT/s)	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
Intel® Xeon® Platinum 81xx Processors Officially Supported Memory Speed (MT/s)				
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
Intel® Xeon® Gold and Silver 51xx/61xx Processors Officially Supported Memory Speed (MT/s)				
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
HPE Server Memory Speed (MT/s): Intel® Xeon® Platinum 81xx Processors *				
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
HPE Server Memory Speed (MT/s): Intel® Xeon® Gold and Silver 51xx/61xx Processors *				
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s

Memory

DIMM Type	Load Reduced (LRDIMM)
HPE SKU P/N	815101-B21
SKU Description	HPE 64 GB 4Rx4 PC4-2666V-L Kit
DIMM Rank ->	Quad Rank (4R)
DIMM Capacity ->	64 GB
Voltage	1.2V
DRAM depth [bit]	2G
DRAM Width [bit]	x4
DRAM Density	8 Gb
CAS Latency	19-19-19
DIMM Native Speed (MT/s)	2666 MT/s
Intel® Xeon® Platinum 81xx Processors Officially Supported Memory Speed (MT/s)	
1 DIMM Per Channel	2666 MT/s
2 DIMM Per Channel	2666 MT/s
Intel® Xeon® Gold and Silver 51xx/61xx Processors Officially Supported Memory Speed (MT/s)	
1 DIMM Per Channel	2400 MT/s
2 DIMM Per Channel	2400 MT/s
HPE Server Memory Speed (MT/s): Intel® Xeon® Platinum 81xx Processors *	
1 DIMM Per Channel	2666 MT/s
2 DIMM Per Channel	2666 MT/s
HPE Server Memory Speed (MT/s): Intel® Xeon® Gold and Silver 51xx/61xx Processors *	
1 DIMM Per Channel	2400 MT/s
2 DIMM Per Channel	2400 MT/s

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
5120	32 GB (2 x16 GB)	384 GB (24 x16 GB)	3072GB (48 x64 GB)
6130	64 GB (4 x16 GB)	384 GB (24 x16 GB)	3072GB (48 x64 GB)
6148	128 GB (8 x16 GB)	384 GB (48 x16 GB)	3072GB (48 x64 GB)
8170	256 GB (16 x16 GB)	384 GB (48 x16 GB)	3072GB (48 x64 GB)
8164	256 GB (16 x16 GB)	384 GB (48 x16 GB)	3072GB (48 x64 GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 4 GB = 4,096 MB
- 8 GB = 8,192 MB
- 16 GB = 16,384 MB
- 32 GB = 32,768 MB
- 64 GB = 65,536 MB

For more information on memory, please see the Memory Quickspecs: [HPE DDR4 SmartMemory](#)

Storage

8 SFF (+2 SFF) hot-plug drive model with Universal Media Bay



24 SFF (incl 12 NVMe SSDs) hot-plug drive model



Technical Specifications

		input for China only - (800W Titanium PS only) 800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input - (800W Universal PS only) 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only) 1600 W at 200 VAC to 240 VAC input, 1600 W at 240 VDC input - (1600W PS Only)
	Maximum Peak Power	800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only) 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Titanium PS only) 800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input- (800W Universal PS only) 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only) 2200 W for 1ms (turbo mode) at 200 VAC to 240 VAC input - (1600W PS Only) NOTE: To review typical system power ratings use the HPE Power Advisor which is available online located at url: http://www.hpe.com/info/hppoweradvisor .
System Inlet Temperature	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae
		For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae
Relative Humidity (non-condensing)	Non-operating	System performance may be reduced if operating in the extended ambient operating range or with a fan fault. -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	8% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Technical Specifications

Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Product Configuration	Entry	Base	Performance
Idle - <i>L</i> _{WAd}	5.0 B	5.1 B	5.1 B
Idle - <i>L</i> _{pAm}	47 dBA	48 dBA	48 dBA
Operating - <i>L</i> _{WAd}	5.3 B	5.7 B	5.6 B
Operating - <i>L</i> _{pAm}	50 dBA	54 dBA	53 dBA

NOTE: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Regulatory Information To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center: <http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Please refer to the appropriate QuickSpecs lists below for technical specifications on controllers.

For information on the HPE Smart Array E208i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P816i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by

Technical Specifications

treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
11-Jul-2017	Version 1	New	New QuickSpecs.



[Sign up for updates](#)

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00008181 - 15931 - Worldwide - V1 - 11-July-2017

