



Overview

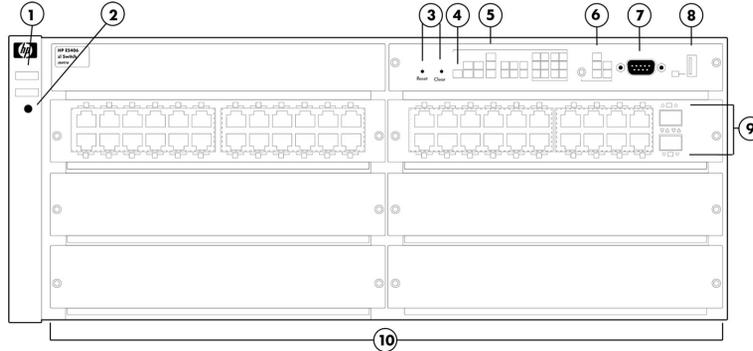

HP 5406-48G zl Switch


- | | | | |
|---|--|----|---|
| 1 | Power and Fault LEDs | 6 | LED Mode Select button and indicator LEDs |
| 2 | Locator LED | 7 | Console Port |
| 3 | Reset and Clear buttons | 8 | Auxiliary Port |
| 4 | Self Test LED | 9 | Module Link and Mode LEDs |
| 5 | Status LEDs for the Fans, Power Supplies, and Switch Modules | 10 | Switch Modules and slots with Link and Mode LEDs for each port located on each module |

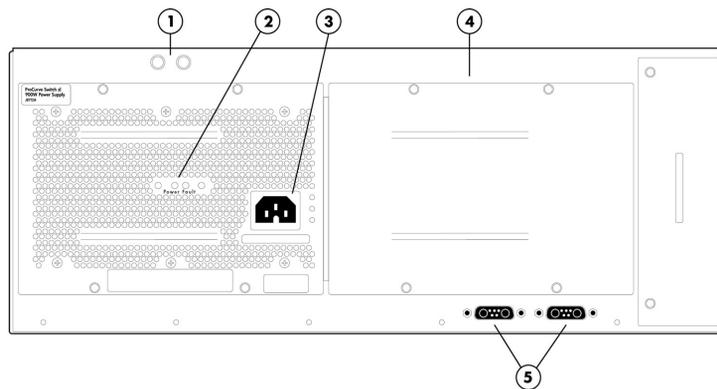

HP 5406-48G zl Switch Rear View


- | | | | |
|---|------------------------------|---|---|
| 1 | Grounding lug mounting holes | 3 | AC power connector |
| 2 | Power and Fault LEDs | 4 | Slot for installing optional redundant power supply |
| | | 5 | External PoE power connectors |

Overview

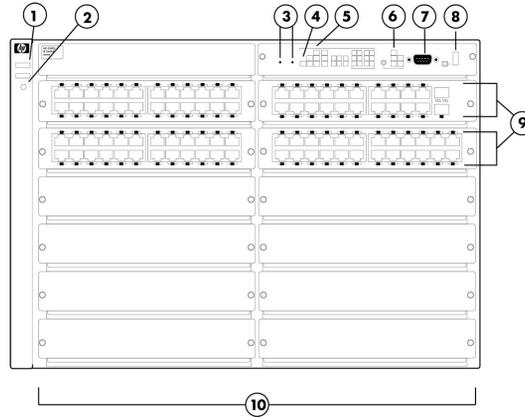

HP 5412-92G zl Switch

- | | | | |
|---|--|----|---|
| 1 | Power and Fault LEDs | 6 | LED Mode Select button and indicator LEDs |
| 2 | Locator LED | 7 | Console Port |
| 3 | Reset and Clear buttons | 8 | Auxiliary Port |
| 4 | Self Test LED | 9 | Module Link and Mode LEDs |
| 5 | Status LEDs for the Fans, Power Supplies, and Switch Modules | 10 | Switch Modules and slots with Link and Mode LEDs for each port located on each module |

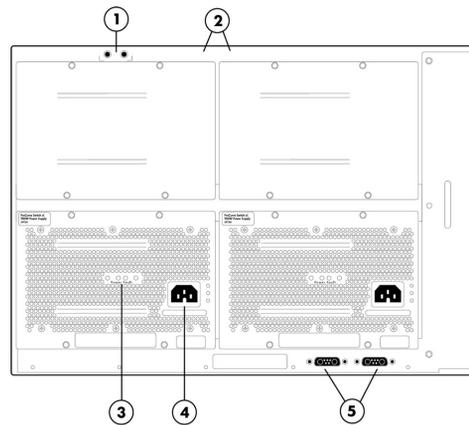

HP 5412-92G zl Switch Rear View

- | | | | |
|---|------------------------------|---|---|
| 1 | Grounding lug mounting holes | 3 | Slot for installing optional redundant power supply |
| 2 | Power and Fault LEDs | 4 | AC power connector |
| | | 5 | External PoE power connectors |

Overview

Models

HP 5406 zl Switch with Premium Software	J9642A
HP 5412 zl Switch with Premium Software	J9643A
HP 5406-44G-PoE+-2XG v2 zl Switch with Premium Software	J9533A
HP 5412-92G-PoE+-2XG v2 zl Switch with Premium Software	J9532A
HP 5406-44G-PoE+-4G-SFP v2 zl Switch with Premium Software	J9539A
HP 5412-92G-PoE+-4G v2 zl Switch with Premium Software	J9540A
HP 5406 8p 10GBASE-T 8p 10GbE SFP+ v2 zl Switch with Premium Software	J9866A

Key Features

- Advanced access layer, distribution, and core
- Integrated L2 to L4 intelligent edge feature set
- Enterprise-class performance and security
- HP AllianceOne integrated
- Scalable 10/100/1000 and 10GbE connectivity

Product overview

The HP 5400 zl Switch Series consists of advanced intelligent switches in the HP modular chassis product line, which includes 6-slot and 12-slot chassis and associated zl modules and bundles. The foundation for the switch series is a purpose-built, programmable ProVision ASIC that allows the most demanding networking features, such as Quality of Service (QoS) and security, to be implemented in a scalable yet granular fashion. With 10/100, Gigabit Ethernet, and 10 Gigabit Ethernet interfaces; choice of PoE+ and non-PoE; integrated Layer 3 features; and HP AllianceOne solutions, the 5400 zl switch series offers excellent investment protection, flexibility, and scalability, as well as ease of deployment, operation, and maintenance.

Features and Benefits

Software-defined networking

- **OpenFlow**
supports OpenFlow 1.0 and 1.3 specifications to enable SDN by allowing separation of the data (packet forwarding) and control (routing decision) paths

Quality of Service (QoS)

- **Advanced classifier-based QoS**
classifies traffic using multiple match criteria based on Layer 2, 3, and 4 information; applies QoS policies such as setting priority level and rate limit to selected traffic on a per-port or per-VLAN basis
- **Layer 4 prioritization**
enables prioritization based on TCP/UDP port numbers
- **Traffic prioritization**
allows real-time traffic classification into eight priority levels mapped to eight queues
- **Bandwidth shaping**
 - **Port-based rate limiting**
provides per-port ingress-/egress-enforced increased bandwidth
 - **Classifier-based rate limiting**
uses an access control list (ACL) to enforce increased bandwidth for ingress traffic on each port
 - **Guaranteed minimum**

Overview

provides per-port, per-queue egress-based reduced bandwidth

- **Class of Service (CoS)**

sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source port, and DiffServ

Management

- **Remote intelligent mirroring**

mirrors selected ingress/egress traffic based on ACL, port, MAC address, or VLAN to a local or remote HP 8200 zl, 6600, 6200 yl, 5400 zl, or 3500 Switch located anywhere on the network

- **RMON, XRMON, and sFlow v5**

provide advanced monitoring and reporting capabilities for statistics, history, alarms, and events

- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP)**

advertises and receives management information from adjacent devices on a network, facilitating easy mapping by network management applications

- **Uni-Directional Link Detection (UDLD)**

monitors a cable between two switches and shuts down the ports on both ends if the cable is broken, turning the bidirectional link into a unidirectional one; this prevents network problems such as loops

- **Management simplicity**

provides common software features and CLI implementation across all HP ProVision-based switches (including the zl and yl switches)

- **Command authorization**

leverages RADIUS to link a custom list of CLI commands to an individual network administrator's login; an audit trail documents activity

- **Friendly port names**

allow assignment of descriptive names to ports

- **Dual flash images**

provide independent primary and secondary operating system files for backup while upgrading

- **Multiple configuration files**

can be stored to the flash image

- **NEW Comware CLI**

- **Comware-compatible CLI**

bridges the experience of Comware CLI users who are using the ProVision software CLI

- **Display and fundamental Comware CLI commands**

are embedded in the switch CLI as native commands; display output formatted as on Comware-based switches; fundamental commands provide a Comware-familiar initial switch setup

- **Configuration Comware CLI commands**

entered Comware CLI configuration commands elicit CLI help formulating the correct ProVision software CLI command

Connectivity

- **IEEE 802.3az Energy Efficient Ethernet**

lowers power consumption in periods of low link usage (supported on v2 zl 10/100/1000 and 10/100 modules)

- **IEEE 802.3af Power over Ethernet (PoE)**

provides up to 15.4 W per port to IEEE 802.3af-compliant PoE-powered devices such as IP phones, wireless access points, and security cameras

- **IEEE 802.3at Power over Ethernet Plus**

provides up to 30 W per port to IEEE 802.3 for PoE- and PoE+-powered devices, such as video IP phones, IEEE 802.11n wireless access points, and advanced pan/zoom/tilt security cameras

- **Prestandard PoE support**

Overview

detects and provides power to prestandard PoE devices; see the list of supported devices in the product FAQ at www.hp.com/networking

- **High-density port connectivity**
provides up to 12 interface module slots and up to 288 wire-speed 10/100/1000 PoE-enabled ports or 96 10-GbE ports per system
- **Jumbo frames**
on Gigabit Ethernet and 10-Gigabit Ethernet ports, jumbo frames allow high-performance remote backup and disaster-recovery services
- **Auto-MDIX**
automatically adjusts for straight-through or crossover cables on all 10/100 and 10/100/1000 ports
- **IPv6**
 - **IPv6 host**
enables switches to be managed in an IPv6 network
 - **Dual stack (IPv4 and IPv6)**
transitions from IPv4 to IPv6, supporting connectivity for both protocols
 - **MLD snooping**
forwards IPv6 multicast traffic to the appropriate interface
 - **IPv6 ACL/QoS**
supports ACL and QoS for IPv6 network traffic
 - **IPv6 routing**
supports static and OSPFv3 routing protocols
 - **6in4 tunneling**
supports encapsulation of IPv6 traffic in IPv4 packets

Performance

- **High-speed, high-capacity architecture**
1 Tbps crossbar switching fabric provides intra-module and inter-module switching with 585.6 million pps throughput on the purpose-built ProVision ASICs
- **Selectable queue configurations**
allows for increased performance by selecting the number of queues and associated memory buffering that best meet the requirements of the network applications

Resiliency and high availability

- **NEW Virtual Router Redundancy Protocol (VRRP)**
allows groups of two routers to dynamically back each other up to create highly available routed environments for IPv4 and IPv6 networks
- **IEEE 802.1s Multiple Spanning Tree Protocol**
provides high link availability in multiple VLAN environments by allowing multiple spanning trees; encompasses IEEE 802.1D Spanning Tree Protocol and IEEE 802.1w Rapid Spanning Tree Protocol
- **IEEE 802.3ad Link Aggregation Control Protocol (LACP) and HP port trunking**
support up to 144 trunks, each with up to eight links (ports) per trunk
- **Distributed trunking**
enables loop-free and redundant network topology without using Spanning Tree Protocol; allows a server or switch to connect to two switches using one logical trunk for redundancy and load sharing
- **Optional redundant power supply (HP 5400 series)**
provides uninterrupted power and allows hot-swapping of the redundant power supplies when installed

Overview

- **Hot-swappable modules (5400 zl series)**
permits modules, mini-GBICs, and power supplies in a redundant power supply configuration to be added or swapped without interrupting the network
- **Sparing simplicity**
HP zl-common accessories (interface modules and power supplies)
- **Uplink Failure Detection**
provides active-standby network path redundancy for servers that are configured for active-standby NIC teaming
- **NEW SmartLink**
provides easy-to-configure link redundancy of active and standby links

Layer 2 switching

- **VLAN support and tagging**
supports the IEEE 802.1Q standard and 2,048 VLANs simultaneously
- **IEEE 802.1v protocol VLANs**
isolate select non-IPv4 protocols automatically into their own VLANs
- **GARP VLAN Registration Protocol**
allows automatic learning and dynamic assignment of VLANs
- **IEEE 802.1ad Q-in-Q**
increases the scalability of an Ethernet network by providing a hierarchical structure; connects multiple LANs on a high-speed campus or metro network
- **MAC-based VLAN**
provides granular control and security; uses RADIUS to map a MAC address/user to specific VLANs (requires v2 modules)
- **Rapid Per-VLAN Spanning Tree (RPVST+)**
allows each VLAN to build a separate spanning tree to improve link bandwidth usage; is compatible with PVST+
- **HP switch meshing**
dynamically load balances across multiple active redundant links to increase available aggregate bandwidth; allows concurrent Layer 3 routing with v2 modules

Layer 3 services

- **User Datagram Protocol (UDP) helper function**
allows UDP broadcasts to be directed across router interfaces to specific IP unicast or subnet broadcast addresses and prevents server spoofing for UDP services such as DHCP
- **Loopback interface address**
defines an address in Routing Information Protocol (RIP) and Open Standard Path First (OSPF), improving diagnostic capability
- **Route maps**
provide more control during route redistribution; allow filtering and altering of route metrics

Layer 3 routing

- **Static IP routing**
provides manually configured routing for both IPv4 and IPv6 networks
- **Routing Information Protocol (RIP)**
provides RIPv1 and RIPv2 routing
- **OSPF**
provides OSPFv2 for IPv4 routing and OSPFv3 for IPv6 routing
- **Policy-based routing**
uses a classifier to select traffic that can be forwarded based on policy set by the network administrator (requires v2 modules)

Overview

- **Border Gateway Protocol (BGP)**
provides IPv4 Border Gateway Protocol routing, which is scalable, robust, and flexible

Security

- **Access control lists (ACLs)**
provide filtering based on the IP field, source/destination IP address/subnet, and source/destination TCP/UDP port number on per-VLAN or per-port basis
- **Multiple user authentication methods**
 - **IEEE 802.1X users per port**
provides authentication of multiple IEEE 802.1X users per port
 - **Web-based authentication**
authenticates from a Web browser for clients that do not support IEEE 802.1X supplicant
 - **MAC-based authentication**
client is authenticated with the RADIUS server based on the client's MAC address
 - **Concurrent IEEE 802.1X, Web, and MAC authentication schemes per port**
switch port accepts up to 32 sessions of IEEE 802.1X, Web, and MAC authentications
- **Virus throttling**
detects traffic patterns typical of worm-type viruses and either throttles or entirely prevents the virus from spreading across the routed VLANs or bridged interfaces without requiring external appliances
- **DHCP protection**
blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks
- **Secure management access**
securely encrypts all access methods (CLI, GUI, or MIB) through SSHv2, SSL, and/or SNMPv3
- **USB Secure Autorun (requires HP PCM+)**
deploys, diagnoses, and updates a switch using a USB flash drive; works with a secure credential to prevent tampering
- **Switch CPU protection**
provides automatic protection against malicious network traffic trying to shut down the switch
- **ICMP throttling**
defeats ICMP denial-of-service attacks by enabling any switch port to automatically throttle ICMP traffic
- **Identity-driven ACL**
enables implementation of a highly granular and flexible access security policy and VLAN assignment specific to each authenticated network user
- **STP BPDU port protection**
blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks
- **Dynamic IP lockdown**
works with DHCP protection to block traffic from unauthorized hosts, preventing IP source address spoofing
- **Dynamic ARP protection**
blocks ARP broadcasts from unauthorized hosts, preventing eavesdropping or theft of network data
- **STP Root Guard**
protects the root bridge from malicious attacks or configuration mistakes
- **Detection of malicious attacks**
monitors 10 types of network traffic and sends a warning when an anomaly that potentially can be caused by malicious attacks is detected
- **Port security**
allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **MAC address lockout**
prevents particular configured MAC addresses from connecting to the network
- **Source-port filtering**
allows only specified ports to communicate with each other

Overview

- **RADIUS/TACACS+**
eases switch management security administration by using a password authentication server
- **Secure Shell**
encrypts all transmitted data for secure remote CLI access over IP networks
- **Secure Sockets Layer (SSL)**
encrypts all HTTP traffic, allowing secure access to the browser-based management GUI in the switch
- **Secure FTP**
allows secure file transfer to and from the switch; protects against unwanted file downloads or unauthorized copying of a switch configuration file
- **Management Interface Wizard**
helps secure management interfaces such as SNMP, telnet, SSH, SSL, Web, and USB at the desired level
- **Switch management logon security**
can require either RADIUS or TACACS+ authentication for secure switch CLI logon
- **Security banner**
displays a customized security policy when users log in to the switch

Convergence

- **IP multicast routing**
includes PIM Sparse and Dense modes to route IP multicast traffic
- **IP multicast snooping** (data-driven IGMP)
automatically prevents flooding of IP multicast traffic
- **LLDP-MED (Media Endpoint Discovery)**
is a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones
- **PoE allocations**
support multiple methods (automatic, IEEE 802.3af class, LLDP-MED, or user specified) to allocate PoE power for more efficient energy savings
- **NEW Auto VLAN configuration for voice**
 - RADIUS VLAN: uses a standard RADIUS attribute and LLDP-MED to automatically configure a VLAN for IP phones
 - CDPv2: uses CDPv2 to configure legacy IP phones
- **NEW Local MAC Authentication**
assigns attributes such as VLAN and QoS using locally configured profile that can be a list of MAC prefixes

Warranty and support

- **Lifetime Warranty 2.0**
advance hardware replacement for as long as you own the product with next-business-day delivery (available in most countries)†
- **Electronic and telephone support (for Lifetime Warranty 2.0)**
limited 24x7 telephone support is available from HP for the first 3 years; limited electronic and business hours telephone support is available from HP for the entire warranty period; to reach our support centers, refer to www.hp.com/networking/contact-support; for details on the duration of support provided with your product purchase, refer to www.hp.com/networking/warrantysummary
- **Software releases**
to find software for your product, refer to www.hp.com/networking/support; for details on the software releases available with your product purchase, refer to www.hp.com/networking/warrantysummary

†HP warranty includes repair or replacement of hardware for as long as you own the product, with next business day advance replacement (available in most countries). The disk drive included with HP AllianceOne Advanced Services and Services zl Modules, HP Threat Management Services zl Module, HP AllianceOne Extended zl Module with Riverbed Steelhead, HP MSM765zl Mobility Controller and HP Survivable Branch Communication zl Module powered by Microsoft Lync has a five-year hardware warranty. For details, refer to

Overview

the Software license and hardware warranty statements at: www.hp.com/networking/warranty.

Configuration

Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

HP 5406 zl Switch with Premium Software <ul style="list-style-type: none">1 Power Supply required4U - Height	J9642A See Configuration Note:4
HP 5406-44G-PoE+-2XG v2 zl Swch w Pm SW <ul style="list-style-type: none">44 autosensing 10/100/1000 port1 - J9306A HP 1500 W PoE+ zl Power Supply included1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zl Module included (min=0 \ max=2 SFP+ Transceivers)1 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included4U - Height	J9533A See Configuration Note:1, 5, 9
PDU CABLE NA/MEX/TW/JP <ul style="list-style-type: none">C15 PDU Jumper Cord (NA/MEX/TW/JP)	J9533A#B2B
PDU CABLE ROW <ul style="list-style-type: none">C15 PDU Jumper Cord (ROW)C15 PDU Jumper Cord (ROW)	J9533A#B2C
High Volt Switch to Wall Power CordHigh Volt Switch to Wall Power Cord <ul style="list-style-type: none">NEMA L6-20P Cord (NA/MEX/JP/TW)	J9533A#B2E
HP 5406 8p10GT 8p10GE Swch and Psw <ul style="list-style-type: none">8 RJ-45 10GbE ports1 - J9306A HP 1500 W PoE+ zl Power Supply included1 - J9546A HP 8-port 10GBASE-T v2 zl Module included1 - J9538A HP 8-port 10GbE SFP+ v2 zl Module included (min=0 \ max=8 SFP+ Transceivers)4U - Height	J9866A See Configuration Note:1, 3, 5, 9
PDU CABLE NA/MEX/TW/JP <ul style="list-style-type: none">C15 PDU Jumper Cord (NA/MEX/TW/JP)	J9866A#B2B
PDU CABLE ROW <ul style="list-style-type: none">C15 PDU Jumper Cord (ROW)	J9866A#B2C
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">NEMA L6-20P Cord (NA/MEX/JP/TW)	J9866A#B2E
HP 5406-44G-PoE+-4G v2 zl Swch w Prm SW <ul style="list-style-type: none">44 autosensing 10/100/1000 port1 - J9306A HP 1500 W PoE+ zl Power Supply included1 - J9535A HP 20-port GT PoE+/4-port SFP v2 zl Mod included (min=0 \ max=4 SFP Transceivers)1 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included4U - Height	J9539A See Configuration Note:2, 5, 9

Configuration

PDU CABLE NA/MEX/TW/JP <ul style="list-style-type: none">• C15 PDU Jumper Cord (NA/MEX/TW/JP)	J9539A#B2B
PDU CABLE ROW <ul style="list-style-type: none">• C15 PDU Jumper Cord (ROW)	J9539A#B2C
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">• NEMA L6-20P Cord (NA/MEX/JP/TW)	J9539A#B2E
HP 5406 8p10GT 8p10GE Swch and Psw <ul style="list-style-type: none">• 8 RJ-45 10GbE ports• 1 - J9306A HP 1500 W PoE+ zl Power Supply included• 1 - J9546A HP 8-port 10GBASE-T v2 zl Module included• 1 - J9538A HP 8-port 10GbE SFP+ v2 zl Module included (min=0 \ max=8 SFP+ Transceivers)• 4U - Height	J9866A See Configuration Note:1, 5, 9
PDU CABLE NA/MEX/TW/JP <ul style="list-style-type: none">• C15 PDU Jumper Cord (NA/MEX/TW/JP)	J9866A#B2B
PDU CABLE ROW <ul style="list-style-type: none">• C15 PDU Jumper Cord (ROW)	J9866A#B2C
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">• NEMA L6-20P Cord (NA/MEX/JP/TW)	J9866A#B2E
HP 5412 zl Switch with Premium Software <ul style="list-style-type: none">• 2 Power Supplies required• 7U - Height	J9643A See Configuration Note:4
HP 5412-92G-PoE+-2XG v2 zl Swch w Pm SW <ul style="list-style-type: none">• 92 autosensing 10/100/1000 port• 2 - J9306A HP 1500 W PoE+ zl Power Supply included• 1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zl Module included(min=0 \ max=2 SFP+ Transceivers)• 3 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included• 7U - Height	J9532A See Configuration Note:1, 5, 9
PDU CABLE NA/MEX/TW/JP <ul style="list-style-type: none">• C15 PDU Jumper Cord (NA/MEX/TW/JP)	J9532A#B2B
PDU CABLE ROW <ul style="list-style-type: none">• C15 PDU Jumper Cord (ROW)	J9532A#B2C
High Volt Switch to Wall Power Cord <ul style="list-style-type: none">• NEMA L6-20P Cord (NA/MEX/JP/TW)	J9532A#B2E

Configuration

HP 5412-92G-PoE+-4G v2 zl Swch w Prm SW	J9540A
<ul style="list-style-type: none"> • 92 autosensing 10/100/1000 port • 2 - J9306A HP 1500 W PoE+ zl Power Supply included • 1 - J9535A HP 20-port Gig-T PoE+ / 4-port SFP v2 zl Module included (min=0 \ max=4 SFP Transceivers) • 3 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included • 7U - Height 	See Configuration Note:2, 5, 9
PDU CABLE NA/MEX/TW/JP	J9540A#B2B
<ul style="list-style-type: none"> • C15 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU CABLE ROW	J9540A#B2C
<ul style="list-style-type: none"> • C15 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	J9540A#B2E
<ul style="list-style-type: none"> • NEMA L6-20P Cord (NA/MEX/JP/TW) 	

Configuration Rules:

Note 1	The following Transceivers install into this Chassis :	
	HP X121 1G SFP LC SX Transceiver	J4858C
	HP X121 1G SFP LC LX Transceiver	J4859C
	HP X121 1G SFP LC LH Transceiver	J4860C
	HP X121 1G SFP RJ45 T Transceiver	J8177C
	HP X122 1G SFP LC BX-D Transceiver	J9142B
	HP X122 1G SFP LC BX-U Transceiver	J9143B
	HP X132 10G SFP+ LC ER Transceiver	J9153A
	HP X132 10G SFP+ LC LR Transceiver	J9151A
	HP X132 10G SFP+ LC LRM Transceiver	J9152A
	HP X132 10G SFP+ LC SR Transceiver	J9150A
	HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
	HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
	HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B
	HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable	J9300A
	HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable	J9301A
	HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable	J9302A
	HP X242 10G SFP+ to SFP+ 10m Direct Attach Copper Cable	J9286B
	HP X242 10G SFP+ to SFP+ 15m Direct Attach Copper Cable	J9287B
Note 2	The following Transceivers install into this switch:	
	HP X121 1G SFP LC SX Transceiver	J4858C
	HP X121 1G SFP LC LX Transceiver	J4859C
	HP X121 1G SFP LC LH Transceiver	J4860C
	HP X121 1G SFP RJ45 T Transceiver	J8177C
	HP X112 100M SFP LC BX-D Transceiver	J9099B
	HP X112 100M SFP LC BX-U Transceiver	J9100B

Configuration

HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X111 100M SFP LC FX Transceiver	J9054C

Note 4 If Switch is ordered in a Rack, Then #B2B, or #B2C is defaulted on the Power Supply's. (Optional when Switch is not Racked. See Drop down remark in "Power Supplies" section.)

Note 5 If #B2E is selected Then replace Localized option with #B2E for power supply and with #B2E for switch . (Offered only in North America, Mexico Taiwan, and Japan)

Note 9 Localization required on orders without #B2B, #B2C, #B2D or #B2E options.

Box Level Integration CTO Models

CTO Solution Sku

HP 54xx CTO Switch Solution	J9809A
<ul style="list-style-type: none"> SSP trigger sku 	See Configuration Note:7

CTO Switch Chassis

HP 5406 zl Switch with Premium Software	J9642A
<ul style="list-style-type: none"> 1 Power Supply required 4U - Height 	See Configuration Note:4, 10

HP 5406-44G-PoE+-2XG v2 zl Swch w Pm SW	J9533A
<ul style="list-style-type: none"> 44 autosensing 10/100/1000 port 1 - J9306A HP 1500 W PoE+ zl Power Supply included 1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zl Module included (min=0 \ max=2 SFP+ Transceivers) 1 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included 4U - Height 	See Configuration Note:1 , 4, 8, 10, 12

PDU CABLE NA/MEX/TW/JP	#B2B
<ul style="list-style-type: none"> C15 PDU Jumper Cord (NA/MEX/TW/JP) 	

PDU CABLE ROW	#B2C
<ul style="list-style-type: none"> C15 PDU Jumper Cord (ROW) 	

High Volt Switch to Wall Power Cord	#B2E
<ul style="list-style-type: none"> NEMA L6-20P Cord (NA/MEX/JP/TW) 	

HP 5406-44G-PoE+-4G v2 zl Swch w Prm SW	J9539A
---	--------

Configuration

- 44 autosensing 10/100/1000 port
- 1 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9535A HP 20-port GT PoE+/4-port SFP v2 zL Mod included (min=0 \ max=4 SFP Transceivers)
- 1 - J9534A HP 24-port Gig-T PoE+ v2 zL Module included
- 4U - Height

See Configuration
Note: 2, 4, 8, 10,
12

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

#B2B

PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

#B2E

HP 5406 8p10GT 8p10GE Swch and Psw

- 8 RJ-45 10GbE ports
- 1 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9546A HP 8-port 10GBASE-T v2 zL Module included
- 1 - J9538A HP 8-port 10GbE SFP+ v2 zL Module included (min=0 \ max=8 SFP+ Transceivers)
- 4U - Height

J9866A
See Configuration
Note:1, 4, 8, 10,
12

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9866A#B2B

PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

J9866A#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

J9866A#B2E

HP 5412 zL Switch with Premium Software

- 2 Power Supplies required
- 7U - Height

J9643A
See Configuration
Note:4

HP 5412-92G-PoE+-2XG v2 zL Swch w Pm SW

- 92 autosensing 10/100/1000 port
- 2 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zL Module included(min=0 \ max=2 SFP+ Transceivers)
- 3 - J9534A HP 24-port Gig-T PoE+ v2 zL Module included
- 7U - Height

J9532A
See Configuration
Note:1, 4, 8, 10,
12

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

#B2B

PDU CABLE ROW

#B2C



Configuration

- C15 PDU Jumper Cord (ROW)

High Volt Switch to Wall Power Cord

#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

HP 5412-92G-PoE+-4G v2 zl Swch w Prm SW

J9540A

- 92 autosensing 10/100/1000 port
- 2 - J9306A HP 1500 W PoE+ zl Power Supply included
- 1 - J9535A HP 20-port Gig-T PoE+ / 4-port SFP v2 zl Module included (min=0 \ max=4 SFP Transceivers)
- 3 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included
- 7U - Height

See Configuration
Note:2, 4, 8, 10,
12

PDU CABLE NA/MEX/TW/JP

#B2B

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

PDU CABLE ROW

#B2C

- C15 PDU Jumper Cord (ROW)

High Volt Switch to Wall Power Cord

#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

Configuration Rules:

Note 1 The following Transceivers install into this Chassis : (Use #0D1 or #B01 if switch is CTO) - if applicable

HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X132 10G SFP+ LC ER Transceiver	J9153A
HP X132 10G SFP+ LC LR Transceiver	J9151A
HP X132 10G SFP+ LC LRM Transceiver	J9152A
HP X132 10G SFP+ LC SR Transceiver	J9150A
HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B
HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable	J9300A
HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable	J9301A
HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable	J9302A
HP X242 10G SFP+ to SFP+ 10m Direct Attach Copper Cable	J9286B
HP X242 10G SFP+ to SFP+ 15m Direct Attach Copper Cable	J9287B

Note 2 The following Transceivers install into this Chassis : (Use #0D1 if switch is CTO) - if applicable

HP X121 1G SFP LC SX Transceiver	J4858C
----------------------------------	--------

Configuration

HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X111 100M SFP LC FX Transceiver	J9054C

- Note 4** Localization required on orders without #B2B, #B2C, #B2D or #B2E options.
- Note 8** If #B2E is selected Then replace Localized option with #B2E for power supply and with #B2E for switch . (Offered only in North America, Mexico Taiwan, and Japan)
- Note 10** If the Switch Chassis is to be Factory Integrated (CTO), Then the #OD1 is required on the Switch Chassis and integrated to the J9809A - HP 5400 CTO Enablement. (Min 1/Max 1 Switch per SSP)
- Note 12** If this Switch is selected, Then a Minimum of 1 factory integrated accessory must be ordered and integrated to CTO chassis. See Menu below, option must have a #OD1 to be integrated to the CTO Chassis.

Rack Level Integration CTO Models

CTO Switch Chassis

HP 5406 zl Switch with Premium Software	J9642A
<ul style="list-style-type: none"> 1 Power Supply required 4U - Height 	See Configuration Note:11
HP 5406-44G-PoE+-2XG v2 zl Swch w Pm SW	J9533A
<ul style="list-style-type: none"> 44 autosensing 10/100/1000 port 1 - J9306A HP 1500 W PoE+ zl Power Supply included 1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zl Module included (min=0 \ max=2 SFP+ ransceivers) 1 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included 4U - Height 	See Configuration Note:1, 4, 11
PDU CABLE NA/MEX/TW/JP	#B2B
<ul style="list-style-type: none"> C15 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU CABLE ROW	#B2C
<ul style="list-style-type: none"> C15 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	#B2E
<ul style="list-style-type: none"> NEMA L6-20P Cord (NA/MEX/JP/TW) 	
HP 5406-44G-PoE+-4G v2 zl Swch w Prm SW	J9539A

Configuration

- 44 autosensing 10/100/1000 port
- 1 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9535A HP 20-port GT PoE+/4-port SFP v2 zL Mod included (min=0 \ max=4 SFP Transceivers)
- 1 - J9534A HP 24-port Gig-T PoE+ v2 zL Module included
- 4U - Height

See Configuration
Note:2, 4, 11

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

#B2B

PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

#B2E

HP 5406 8p10GT 8p10GE Swch and Psw

- 8 RJ-45 10GbE ports
- 1 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9546A HP 8-port 10GBASE-T v2 zL Module included
- 1 - J9538A HP 8-port 10GbE SFP+ v2 zL Module included (min=0 \ max=8 SFP+ Transceivers)
- 4U - Height

J9866A
See Configuration
Note:1, 4, 11

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9866A#B2B

PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

J9866A#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

J9866A#B2E

HP 5412 zL Switch with Premium Software

- 2 Power Supplies required
- 7U - Height

J9643A
See Configuration
Note:11

HP 5412-92G-PoE+-2XG v2 zL Swch w Pm SW

- 92 autosensing 10/100/1000 port
- 2 - J9306A HP 1500 W PoE+ zL Power Supply included
- 1 - J9536A HP 20-port Gig-T PoE+ / 2-port 10-GbE SFP+ v2 zL Module included(min=0 \ max=2 SFP+ Transceivers)
- 3 - J9534A HP 24-port Gig-T PoE+ v2 zL Module included
- 7U - Height

J9532A
See Configuration
Note:1, 4, 11

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

#B2B

PDU CABLE ROW

#B2C



Configuration

- C15 PDU Jumper Cord (ROW)

High Volt Switch to Wall Power Cord

#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

HP 5412-92G-PoE+-4G v2 zl Swch w Prm SW

J9540A

- 92 autosensing 10/100/1000 port
- 2 - J9306A HP 1500 W PoE+ zl Power Supply included
- 1 - J9535A HP 20-port Gig-T PoE+ / 4-port SFP v2 zl Module included (min=0 \ max=4 SFP Transceivers)
- 3 - J9534A HP 24-port Gig-T PoE+ v2 zl Module included
- 7U - Height

See Configuration
Note:2, 4, 5, 8

PDU CABLE NA/MEX/TW/JP

#B2B

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

PDU CABLE ROW

#B2C

- C15 PDU Jumper Cord (ROW)

High Volt Switch to Wall Power Cord

#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

Configuration Rules:

Note 1 The following Transceivers install into this Chassis : (Use #0D1 or #B01 if switch is CTO) - if applicable

HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X132 10G SFP+ LC ER Transceiver	J9153A
HP X132 10G SFP+ LC LR Transceiver	J9151A
HP X132 10G SFP+ LC LRM Transceiver	J9152A
HP X132 10G SFP+ LC SR Transceiver	J9150A
HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B
HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable	J9300A
HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable	J9301A
HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable	J9302A
HP X242 10G SFP+ to SFP+ 10m Direct Attach Copper Cable	J9286B
HP X242 10G SFP+ to SFP+ 15m Direct Attach Copper Cable	J9287B

Note 2 The following Transceivers install into this Chassis : (Use #0D1 if switch is CTO) - if applicable

HP X121 1G SFP LC SX Transceiver	J4858C
----------------------------------	--------



Configuration

HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X111 100M SFP LC FX Transceiver	J9054C

Note 4 Localization required on orders without #B2B, #B2C, #B2D or #B2E options.

Note 6 If the CTO Base Model is ordered #0D1, Then #B2B, or #B2C is Required on the Power Supply's. (Optional when Switch is not Factory Racked. See Drop down remark in "Power Supplies" section.)

Note 11 If the CTO Switch Chassis needs to be racked, Then the CTO Base Model needs to integrate (with #0D1) to the HP Rack.

Internal Power Supplies

J9642Ax System (std 0 // max 2) User Selection (min 1 / max 2)

J9533Ax, J9866A and J9539Ax System (std 1 // max 2) User Selection (min 0 / max 1)

J9643Ax System (std 0 // max 4) User Selection (min 2 / max 4)

J9532Ax and J9540x System (std 2 // max 4) User Selection (min 0 / max 2)

HP 1500 W PoE+ zl Power Supply

- C15 Outlet

J9306A
See Configuration
Note:1, 2, 6

PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9306A#B2B

PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

J9306A#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

J9306A#B2E

HP 875W zl Power Supply

- C15 Outlet

J8712A
See Configuration
Note:1, 2, 5, 6

PDU CABLE NA/MEX/TW/JP

J8712A#B2B



Configuration

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

High Volt Switch to Wall Power Cord

J8712A#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

HP 1500 W zL Power Supply

J8713A

- C20 Outlet

See Configuration
Note:1, 2, 5, 6

C19 PDU WW

J8713A#B2D

- C19 to C20 Jumper Cord

High Volt Switch to Wall Power Cord

J8713A#B2E

- NEMA L6-20P Cord (NA/MEX/JP/TW)

Configuration Rules:

Note 1 Power Supplies cannot be mixed for a switch enclosure

Note 2 Localization required on orders without #B2B, #B2C or #B2E options.

Note 5 This power supply is not supported on the J9533Ax, J9539Ax, J9532Ax, J9866A and J9540x switches.

Note 6 If #B2E is selected Then replace Localized option with #B2E for power supply and with #B2E for switch . (Offered only in NA, Mexico,, Taiwan, and Japan)

Remarks:

"Drop down under power supply should offer the following options and results:

Switch/Router/Power Supply to PDU Power Cord - #B2B in North America, Mexico, Taiwan, and Japan or #B2C ROW. (Watson Default B2B or B2C for Rack Level CTO)

Switch/Router/Power Supply to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO)

High Volt Switch/Router/Power Supply to Wall Power Cord - #B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)"

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

Modules

J9642x only - System (std 0 // max=6) User Selection (min 0 / max=6) per Chassis

J9643x only - System (std 0 // max=12) User Selection (min 0 / max=12) per Chassis

J9533x, J9539x, J8699x, J9447x, J9866A only - System (std 2 // max=6) User Selection (min 0 / max=4) per Chassis

Configuration

J8700x, J9532x, J9448x, J9450x only - System (std 4 // max=12) User Selection (min 0 / max=8) per Chassis

HP 20-port GT PoE+/4-port SFP v2 zl Mod <ul style="list-style-type: none">min=0 \ max=4 SFP Transceivers	J9535A See Configuration Note:1
HP 24-port SFP v2 zl Module <ul style="list-style-type: none">min=0 \ max=24 SFP Transceivers	J9537A See Configuration Note:1
HP 12p Gig-T PoE+/12p SFP v2 zl Mod <ul style="list-style-type: none">min=0 \ max=12 SFP Transceivers	J9637A See Configuration Note:1
HP 20-port Gig-T / 4-port SFP v2 zl Mod <ul style="list-style-type: none">min=0 \ max=20 SFP Transceivers	J9549A See Configuration Note:1
HP 4-port 10GbE SFP+ zl Module <ul style="list-style-type: none">min=0 \ max=4 SFP+ Transceivers	J9309A See Configuration Note:2
HP 8-port 10 GbE SFP+ v2 zl Module <ul style="list-style-type: none">min=0 \ max=8 SFP+ Transceivers	J9538A See Configuration Note:5
HP 20p GT PoE+ / 2p SFP+ v2 zl Module <ul style="list-style-type: none">min=0 \ max=2 SFP+ Transceivers	J9536A See Configuration Note:5
HP 20-port Gig-T / 2-port SFP+ v2 zl Mod <ul style="list-style-type: none">min=0 \ max=2 SFP+ Transceivers	J9548A See Configuration Note:5
HP 4-Port 10 GbE X2 zl Module <ul style="list-style-type: none">min=0 \ max=2 X2 Transceivers	J8707A See Configuration Note:3
HP 4-Port 10 GbE CX4 zl Module <ul style="list-style-type: none">min=0 \ max=2 CX4 Media Converter	J8708A
HP 8-port 10GBase-T v2 zl Module <ul style="list-style-type: none">No Transceivers	J9546A
HP 24-Port 10/100/1000 PoE zl Module	J8702A

Configuration

<ul style="list-style-type: none">No Transceivers	
HP 20p 10/100/1000 PoE+/4p MGBIC zl Mod	J9308A
<ul style="list-style-type: none">No Transceivers	See Configuration Note:1
HP 20-Port Gig-T/4-Port Mini-GBIC zl Module	J8705A
<ul style="list-style-type: none">No Transceivers	See Configuration Note:12
HP 24-Port Mini-GBIC zl Module	J8706A
<ul style="list-style-type: none">No Transceivers	See Configuration Note:12
HP 24-Port 10/100/1000 PoE+ zl Module	J9307A
<ul style="list-style-type: none">No Transceivers	
HP 24-port Gig-T PoE+ v2 zl Module	J9534A
<ul style="list-style-type: none">No Transceivers	
HP 24-Port 10/100 PoE+ zl Module	J9478A
<ul style="list-style-type: none">No Transceivers	
HP 24-port 10/100 PoE+ v2 zl Module	J9547A
<ul style="list-style-type: none">No Transceivers	
HP 24-port Gig-T v2 zl Module	J9550A
<ul style="list-style-type: none">No Transceivers	
HP MSM765 zl Mobility Controller	J9370A
<ul style="list-style-type: none">No Transceivers	
HP MSM775 zl Premium Controller Module	J9840A
<ul style="list-style-type: none">No Transceivers	See Configuration Note:10
HP Surv Brch Com zl Mod pwrby Msft Lync	J9485A
<ul style="list-style-type: none">No Transceivers. Double Height Module, takes up 2 Vertical slots*	See Configuration Note:4, 6, 7, 8, 9
HP Svc zlMod f/AvayaSBC pwrby AcmePacket	J9486A
<ul style="list-style-type: none">No Transceivers. Double Height Module, takes up 2 Vertical slots*	See Configuration Note:6, 7, 8, 9
HP Advanced Services v2 zl Module w/ HDD	J9857A

Configuration

- No Transceivers See Configuration Note:11

- HP Advanced Services v2 zl Module w/ SSD J9858A
 - No Transceivers See Configuration Note:11

- HP Adv Svcs zl Mod w/XenServer Platform J9747A
 - No Transceivers See Configuration Note:6, 7, 8

- HP Adv Svcs zl Mod w/vSphere Platform J9748A
 - No Transceivers See Configuration Note:6, 7, 8

Configuration Rules:

- Note 1** The following Transceivers install into this Module: (Use #0D1 if switch is CTO) - if applicable
- | | |
|--------------------------------------|--------|
| HP X111 100M SFP LC FX Transceiver | J9054C |
| HP X112 100M SFP LC BX-D Transceiver | J9099B |
| HP X112 100M SFP LC BX-U Transceiver | J9100B |
| HP X121 1G SFP LC LH Transceiver | J4860C |
| HP X121 1G SFP LC SX Transceiver | J4858C |
| HP X121 1G SFP LC LX Transceiver | J4859C |
| HP X122 1G SFP LC BX-D Transceiver | J9142B |
| HP X122 1G SFP LC BX-U Transceiver | J9143B |
| HP X121 1G SFP RJ45 T Transceiver | J8177C |
-
- Note 2** The following Transceivers install into this Module: (Use #0D1 or #B01 if switch is CTO) - if applicable
- | | |
|---|--------|
| HP X132 10G SFP+ LC ER Transceiver | J9153A |
| HP X132 10G SFP+ LC LR Transceiver | J9151A |
| HP X132 10G SFP+ LC LRM Transceiver | J9152A |
| HP X132 10G SFP+ LC SR Transceiver | J9150A |
| HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable | J9281B |
| HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable | J9283B |
| HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable | J9285B |
| HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable | J9300A |
| HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable | J9301A |
| HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable | J9302A |
| HP X242 10G SFP+ to SFP+ 10m Direct Attach Copper Cable | J9286B |
| HP X242 10G SFP+ to SFP+ 15m Direct Attach Copper Cable | J9287B |

Configuration

- Note 3** The following Transceivers install into this Module: (Use #0D1 if switch is CTO) - if applicable
- | | |
|-----------------------------------|--------|
| HP X131 10G X2 SC SR Transceiver | J8436A |
| HP X131 10G X2 SC LR Transceiver | J8437A |
| HP X131 10G X2 SC ER Transceiver | J8438A |
| HP X131 10G X2 SC LRM Transceiver | J9144A |
- Note 4** The following Upgrades install into this Module:
- | | |
|--|--------|
| Sangoma 2-port T1/E1/J1 Telephony Card | J9488A |
| Sangoma 4-port T1/E1/J1 Telephony Card | J9489A |
| Sangoma 4-port FXO Telephony Card | J9516A |
| Sangoma 4-port FXS Telephony Card | J9482A |
| Sangoma 2-p FXO / 2-p FXS Telephony Card | J9518A |
| Sangoma 1-port T1/E1/J1 Telephony Card | J9487A |
- Note 5** The following Transceivers install into this Module: (Use #0D1 if switch is CTO) - if applicable
- | | |
|--|--------|
| HP X121 1G SFP LC LH Transceiver | J4860C |
| HP X121 1G SFP LC SX Transceiver | J4858C |
| HP X121 1G SFP LC LX Transceiver | J4859C |
| HP X122 1G SFP LC BX-D Transceiver | J9142B |
| HP X122 1G SFP LC BX-U Transceiver | J9143B |
| HP X121 1G SFP RJ45 T Transceiver | J8177C |
| HP X132 10G SFP+ LC ER Transceiver | J9153A |
| HP X132 10G SFP+ LC LR Transceiver | J9151A |
| HP X132 10G SFP+ LC LRM Transceiver | J9152A |
| HP X132 10G SFP+ LC SR Transceiver | J9150A |
| HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable | J9281B |
| HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable | J9283B |
| HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable | J9285B |
| HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable | J9300A |
| HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable | J9301A |
| HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable | J9302A |
- Note 6** For Switches: J9643A, J9532A, J9540A; If this module is selected, Then Max = 4 Modules of any combination or pairing of the following modules: J9517A, J9485A, J9486A, J9289A, J9483A, J9666A, J9747A, J9748A. Double Height Modules occupy 2 vertical slots.
- Note 7** If this module is selected, Then show following message:
For better airflow, This module must be located on left side only in the following Switches: J9642A, J9533A, J9539A, J9866A.
For better airflow, It is preferred, but not required, that This module be located on left side only in the following Switches: J9643A, J9532A, J9540A.
- Note 8** For Switches J9642A, J9533A, J9539A, J9866A; If this module is selected, Then Max = 3 SLOTS on left side of chassis only, of any combination or pairing of the following modules: J9517A, J9485A, J9486A, J9289A, J9483A, J9666A, J9747A, J9748A. Double Height Modules occupy 2 vertical slots.

Configuration

- Note 9** This module occupies 2 Vertical Slots.
- Note 10** Maximum of this Module per Chassis:
J9642A min=0\max=5 per Chassis
J9533A, J9539A, J9866A min=0\max=4 per Chassis
J9643A, J9532A, J9540A min=0\max=6 per Chassis
There are no restrictions on which slots these modules may go in.
- Note 11** Maximum of this Module per Chassis:
J9642A, J9533A, J9539A, J9866A min=0\max=4 per Chassis
J9643A, J9532A, J9540A min=0\max=6 per Chassis
There are no restrictions on which slots these modules may go in.

Transceivers

SFP Transceivers

HP X111 100M SFP LC FX Transceiver	J9054C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP LC SX Transceiver	J4858C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X121 1G SFP RJ45 T Transceiver	J8177C

SFP+ Transceivers

HP X132 10G SFP+ LC ER Transceiver	J9153A
HP X132 10G SFP+ LC LR Transceiver	J9151A
HP X132 10G SFP+ LC LRM Transceiver	J9152A
HP X132 10G SFP+ LC SR Transceiver	J9150A
HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B#B01

Configuration

HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B#B01
HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B#B01
HP X242 10G SFP+ 10m DAC Cable	J9286B
HP X242 10G SFP+ 15m DAC Cable	J9287B
HP X244 10G XFP to SFP+ 1m Direct Attach Copper Cable	J9300A#B01
HP 10G X244 XFP to SFP+ 3m Direct Attach Copper Cable	J9301A#B01
HP 10G X244 XFP to SFP+ 5m Direct Attach Copper Cable	J9302A#B01

X2 Transceivers

HP X131 10G X2 SC ER Transceiver	J8438A
HP X131 10G X2 SC LR Transceiver	J8437A
HP X131 10G X2 SC LRM Transceiver	J9144A
HP X131 10G X2 SC SR Transceiver	J8436A

Cables

Multi-Mode Cables

HP .5m Multi-mode OM3 LC/LC FC Cable	AJ833A
HP 1m Multi-mode OM3 LC/LC FC Cable	AJ834A
HP 2 m Multimode OM3 LC/LC FC Cable	AJ835A
HP 5 m Multimode OM3 LC/LC FC Cable	AJ836A
HP 15 m Multimode OM3 LC/LC FC Cable	AJ837A
HP 30 m Multimode OM3 LC/LC FC Cable	AJ838A
HP 50 m Multimode OM3 LC/LC FC Cable	AJ839A
HP Premier Flex LC/LC OM4 2f 1m Cbl	QK732A

Configuration

HP Premier Flex LC/LC OM4 2f 2m Cbl	QK733A
HP Premier Flex LC/LC OM4 2f 5m Cbl	QK734A
HP Premier Flex LC/LC OM4 2f 15m Cbl	QK735A
HP Premier Flex LC/LC OM4 2f 30m Cbl	QK736A
HP Premier Flex LC/LC OM4 2f 50m Cbl	QK737A

Switch Enclosure Options

External Redundant Power Supplies

HP zl Power Supply Shelf	J8714A
<ul style="list-style-type: none">• Height = 3U	

Configuration Rules:

Note 1 This shelf allows the addition of 2 extra J9306A - HP 1500 W PoE+ zl Power Supply in order to increase the number of POE+ ports.

Remarks:

Cables included: includes two 2 m PoE (EPS) cables; cables can be used to carry PoE power to the connected switch; no extra cables are needed for a complete solution. Flexible mounting: the power shelf can be mounted forward or rear facing in a rack; in a four-post rack, two power shelves can be mounted front to front, requiring only 3U of rack space.

License

HP MSM760/765 Additional 40 AP License	J9371A
--	--------

Remarks:

The License is an option to the J9370A.

Survivable Branch Communication Upgrades

Sangoma 2-port T1/E1/J1 Telephony Card	J9488A
Sangoma 4-port T1/E1/J1 Telephony Card	J9489A
Sangoma 4-port FX0 Telephony Card	J9516A
Sangoma 4-port FXS Telephony Card	J9482A
Sangoma 2-port FX0 / 2-port FXS Telephony Card	J9518A

Configuration

Sangoma 1-port T1/E1/J1 Telephony Card

J9487A

Remarks:

The Sangoma Telephony Cards are accessories to the J9485A.

US Federal Government certifications

HP zL Chassis FIPS 10K Rack Mounting Kit

J9708A

[See Configuration Note:1](#)

HP 16mm x 32mm Tmpr-Evidence (20) Labels

J9740A

[See Configuration Note:1](#)

HP 16mm x 32mm Tmpr-Evidence (120) Label

J9709A

[See Configuration Note:1](#)

HP 5406 zL FIPS Opacity Shield Kit

J9710A

[See Configuration Note:1](#)

HP 5412 zL FIPS Opacity Shield Kit

J9711A

[See Configuration Note:1](#)

HP 5406 zL High Performance Fan Tray

J9721A

[See Configuration Note:1](#)

HP 5412 zL High Performance Fan Tray

J9722A

[See Configuration Note:1](#)

Configuration Rules:

Note 1 [Do not display in Watson.](#)

Technical Specifications

HP 5406 zL Switch with Premium Software (J9642A)	I/O ports and slots	6 open module slots Supports a maximum of 48 10-GbE ports or 144 autosensing 10/100/1000 ports or 144 mini-GBICs, or a combination
	Power supplies	2 power supply slots 1 minimum power supply required (ordered separately)
Physical characteristics	Dimensions	17.5(w) x 17.75(d) x 6.9(h) in (44.45 x 45.09 x 17.53 cm) (4U height)
	Weight	23.55 lb (10.68 kg)
Memory and processor	Gigabit Module	ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM
	10G module	ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM
	Management Module	Freescale PowerPC 8540 @ 666 MHz, 4 MB flash, 128 MB compact flash, 256 MB DDR SDRAM
Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	1000 Mb Latency	< 3.7 μ s (FIFO 64-byte packets)
	10 Gbps Latency	< 2.1 μ s (FIFO 64-byte packets)
	Throughput	up to 282.1 million pps
	Routing/Switching capacity	379.2 Gbps
	Switch fabric speed	379.2 Gbps
	Routing table size	10000 entries (IPv4), 5000 entries (IPv6)
	MAC address table size	64000 entries
Environment	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 57 dB, Pressure: 40.2 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Achieved Miercom Certified Green Award	
	Description	Chassis ships without power supplies. Two power supply slots are available; three different power supplies are available. See power supply products for additional specifications.
	Maximum heat dissipation	2450 BTU/hr (2584 kJ/hr), (max. non-PoE); 3700 BTU/hr (3903 kJ/hr) (max. using PoE)

Technical Specifications

	Voltage	100-127/200-240 VAC
Safety		CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950
Emissions		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management		HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (serial RS-232C)
Notes		Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).
Services		<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UY909E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UY910E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY911E)</p> <p>3-year, 24x7 SW phone support, software updates (UY912E)</p> <p>Installation with minimum configuration, system-based pricing (U4828E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4832E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UW452E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UW453E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW454E)</p> <p>4-year, 24x7 SW phone support, software updates (UW455E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UW473E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UW474E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW475E)</p> <p>5-year, 24x7 SW phone support, software updates (UY938E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UY913E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW456E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UY939E)</p> <p>1-year, 4-hour onsite, 13x5 coverage for hardware (HR599E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware (HR600E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR603E)</p> <p>1-year, 24x7 software phone support, software updates (HR602E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR601E)</p>

Technical Specifications

- 1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS738E)
- 1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS739E)
- 3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS740E)
- 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS741E)
- 4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS742E)
- 4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS743E)
- 5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS744E)
- 5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS745E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5412 zl Switch with Premium Software (J9643A)	I/O ports and slots	12 open module slots Supports a maximum of 96 10-GbE ports or 288 autosensing 10/100/1000 ports or 288 mini-GBICs, or a combination
	Power supplies	4 power supply slots 2 minimum power supplies required (ordered separately)
	Physical characteristics	Dimensions 17.5(w) x 17.75(d) x 12.1(h) in (44.45 x 45.09 x 30.73 cm) (7U height) Weight 34.94 lb (15.85 kg)
	Memory and processor	Gigabit Module ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM 10G module ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM Management Module Freescale PowerPC 8540 @ 666 MHz, 4 MB flash Mb, 128 MB compact flash, 256 MB DDR SDRAM
	Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
	Performance	1000 Mb Latency < 3.7 μ s (FIFO 64-byte packets) 10 Gbps Latency < 2.1 μ s (FIFO 64-byte packets) Throughput up to 564.2 million pps Routing/Switching capacity 758.4 Gbps Switch fabric speed 758.4 Gbps Routing table size 10000 entries (IPv4), 5000 entries (IPv6) MAC address table size 64000 entries

Technical Specifications

Environment	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 64 dB, Pressure: 57.5 dB ISO 7779, ISO 9296
	Electrical characteristics	Frequency
Description		Chassis ships without power supplies. Four power supply slots are available; three different power supplies are available. See power supply products for additional specifications.
Maximum heat dissipation		4900 BTU/hr (5169 kJ/hr), (max. non-PoE); 7400 BTU/hr (7,807 kJ/hr) (max. using PoE)
Voltage		100-127/200-240 VAC
Safety	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (serial RS-232C)	
Notes	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (UY914E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware (UY915E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY916E)	
	3-year, 24x7 SW phone support, software updates (UW440E) Installation with minimum configuration, system-based pricing (U4828E)	

Technical Specifications

Installation with HP-provided configuration, system-based pricing (U4832E)
4-year, 4-hour onsite, 13x5 coverage for hardware (UW457E)
4-year, 4-hour onsite, 24x7 coverage for hardware (UW458E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW459E)
4-year, 24x7 SW phone support, software updates (UW460E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UY940E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UY917E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UY918E)
5-year, 24x7 SW phone support, software updates (UY919E)
3 Yr 6 hr Call-to-Repair Onsite (UW441E)
4 Yr 6 hr Call-to-Repair Onsite (UW461E)
5 Yr 6 hr Call-to-Repair Onsite (UY920E)
1-year, 4-hour onsite, 13x5 coverage for hardware (HR604E)
1-year, 4-hour onsite, 24x7 coverage for hardware (HR605E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR608E)
1-year, 24x7 software phone support, software updates (HR607E)
1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR606E)
1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS746E)
1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS747E)
3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)
3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)
3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS749E)
4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS750E)
4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS751E)
5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS752E)
5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS753E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5406-44G-PoE+-2XG v2 zL Switch with Premium Software (J9533A) **Included accessories**

1 HP 20-port Gig-T PoE+ / 2-port 10GbE SFP+ v2 zL Module (J9536A)
1 HP 1500W PoE+ zL Power Supply (J9306A)
1 HP 24-port Gig-T PoE+ v2 zL Module (J9534A)

Ports

44 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full;

Technical Specifications

		1000BASE-T: full only
		2 open 10-GbE SFP+ transceiver slots
		4 open module slots
		Supports a maximum of 16 10-GbE ports or 140 autosensing 10/100/1000 ports or 100 mini-GBICs, or a combination
Power supplies		2 power supply slots
		1 minimum power supply required
		includes: 1 x J9306A (HP 1500W PoE+ zl Power Supply)
Physical characteristics	Dimensions	17.5(w) x 17.75(d) x 6.9(h) in (44.45 x 45.09 x 17.53 cm) (4U height)
	Weight	46.08 lb (20.9 kg)
Memory and processor	Gigabit Module	ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM
	10G module	ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM
	Management Module	Freescale PowerPC 8540 @ 666 MHz, 4 MB flash, 128 MB compact flash, 256 MB DDR SDRAM
Mounting		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	1000 Mb Latency	< 3.7 μ s (FIFO 64-byte packets)
	10 Gbps Latency	< 2.1 μ s (FIFO 64-byte packets)
	Throughput	up to 282.1 million pps
	Routing/Switching capacity	379.2 Gbps
	Switch fabric speed	379.2 Gbps
	Routing table size	10000 entries (IPv4), 5000 entries (IPv6)
	MAC address table size	64000 entries
Environment	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 57 dB, Pressure: 40.2 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Description	One J9306A installed. One open power supply slot is available; three different power supplies are available. See power supply products for additional specifications.

Technical Specifications

	Maximum heat dissipation	2450 BTU/hr (2584.75 kJ/hr), (max. non-PoE); 3700 BTU/hr (3903 kJ/hr) (max. using PoE)
	Voltage	100-127/200-240 VAC
	Idle power	215 W
Safety		CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950
Emissions		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management		HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (Serial RS-232C)
Notes		Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).
Services		3-year, 4-hour onsite, 13x5 coverage for hardware (UY909E) 3-year, 4-hour onsite, 24x7 coverage for hardware (UY910E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY911E) 3-year, 24x7 SW phone support, software updates (UY912E) Installation with minimum configuration, system-based pricing (U4828E) Installation with HP-provided configuration, system-based pricing (U4832E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UW452E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UW453E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW454E) 4-year, 24x7 SW phone support, software updates (UW455E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UW473E) 5-year, 4-hour onsite, 24x7 coverage for hardware (UW474E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW475E) 5-year, 24x7 SW phone support, software updates (UY938E) 3 Yr 6 hr Call-to-Repair Onsite (UY913E) 4 Yr 6 hr Call-to-Repair Onsite (UW456E) 5 Yr 6 hr Call-to-Repair Onsite (UY939E) 1-year, 4-hour onsite, 13x5 coverage for hardware (HR599E) 1-year, 4-hour onsite, 24x7 coverage for hardware (HR600E) 1-year, 6 hour Call-To-Repair Onsite for hardware (HR603E)

Technical Specifications

- 1-year, 24x7 software phone support, software updates (HR602E)
- 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR601E)
- 1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS738E)
- 1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS739E)
- 3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS740E)
- 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS741E)
- 4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS742E)
- 4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS743E)
- 5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS744E)
- 5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS745E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5412-92G-PoE+-2XG v2 zL Switch with Premium Software (J9532A)	Included accessories	3 HP 24-port Gig-T PoE+ v2 zL Module (J9534A) 1 HP 20-port Gig-T PoE+ / 2-port 10GbE SFP+ v2 zL Module (J9536A) 2 HP 1500W PoE+ zL Power Supply (J9306A)
	I/O ports and slots	92 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 2 open 10-GbE SFP+ transceiver slots 8 open module slots Supports a maximum of 32 10-GbE ports or 284 autosensing 10/100/1000 ports or 196 mini-GBICs, or a combination
	Power supplies	4 power supply slots 2 minimum power supplies required includes: 2 x J9306A (HP 1500W PoE+ zL Power Supply)
	Physical characteristics	Dimensions 17.5(w) x 17.75(d) x 12.1(h) in (44.45 x 45.09 x 30.73 cm) (7U height) Weight 75.36 lb (34.18 kg)
	Memory and processor	Gigabit Module ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM 10G module ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM Management Module Freescale PowerPC 8540 @ 666 MHz, 4 MB flash Mb, 128 MB compact flash, 256 MB DDR SDRAM

Technical Specifications

Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	1000 Mb Latency	< 3.7 μ s (FIFO 64-byte packets)
	10 Gbps Latency	< 2.1 μ s (FIFO 64-byte packets)
	Throughput	up to 564.2 million pps
	Routing/Switching capacity	758.4 Gbps
	Switch fabric speed	758.4 Gbps
	Routing table size	10000 entries (IPv4), 5000 entries (IPv6)
	MAC address table size	64000 entries
Environment	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 64 dB, Pressure: 57.5 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Description	Two J9306A installed. Two open power supply slots are available; three different power supplies are available. See power supply products for additional specifications.
	Maximum heat dissipation	4900 BTU/hr (5169.5 kJ/hr), (max. non-PoE); 7400 BTU/hr (7807 kJ/hr) (max. using PoE)
	Voltage	110-127/200-240 VAC
	Idle power	312 W
Safety	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz

Technical Specifications

	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (Serial RS-232C)	
Notes	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).	
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UY914E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UY915E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY916E)</p> <p>3-year, 24x7 SW phone support, software updates (UW440E)</p> <p>Installation with minimum configuration, system-based pricing (U4828E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4832E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UW457E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UW458E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW459E)</p> <p>4-year, 24x7 SW phone support, software updates (UW460E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UY940E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UY917E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UY918E)</p> <p>5-year, 24x7 SW phone support, software updates (UY919E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW441E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW461E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UY920E)</p> <p>1-year, 4-hour onsite, 13x5 coverage for hardware (HR604E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware (HR605E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR608E)</p> <p>1-year, 24x7 software phone support, software updates (HR607E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR606E)</p> <p>1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS746E)</p> <p>1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS747E)</p> <p>3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)</p> <p>3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)</p> <p>3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS749E)</p> <p>4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS750E)</p> <p>4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS751E)</p> <p>5-year, 24x7 software phone support, software updates + Next Business Day</p>	

Technical Specifications

Hardware Exchange (HS752E)

5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS753E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5406-44G-PoE+-4G-SFP v2 zl Switch with Premium Software (J9539A)	Included accessories	1 HP 24-port Gig-T PoE+ v2 zl Module (J9534A) 1 HP 20-port Gig-T PoE+ / 4-port SFP v2 zl Module (J9535A) 1 HP 1500W PoE+ zl Power Supply (J9306A)
	Ports	44 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 4 open mini-GBIC slots 4 open module slots Supports a maximum of 16 10-GbE ports or 140 autosensing 10/100/1000 ports or 100 mini-GBICs, or a combination
	Power supplies	2 power supply slots 1 minimum power supply required includes: 1 x J9306A (HP 1500W PoE+ zl Power Supply)
	Physical characteristics	Dimensions 17.5(w) x 17.75(d) x 6.9(h) in (44.45 x 45.09 x 17.53 cm) (4U height) Weight 45.58 lb (20.68 kg)
	Memory and processor	Gigabit Module ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM 10G module ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM Management Module Freescale PowerPC 8540 @ 666 MHz, 4 MB flash, 128 MB compact flash, 256 MB DDR SDRAM
	Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
	Performance	1000 Mb Latency < 3.7 μ s (FIFO 64-byte packets) 10 Gbps Latency < 2.1 μ s (FIFO 64-byte packets) Throughput up to 282.1 million pps Routing/Switching capacity 379.2 Gbps Switch fabric speed 379.2 Gbps Routing table size 10000 entries (IPv4), 5000 entries (IPv6) MAC address table size 64000 entries
	Environment	Operating temperature 32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed Operating relative humidity 15% to 95% @ 131°F (55°C), noncondensing

Technical Specifications

	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 57 dB, Pressure: 40.2 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Description	One J9306A installed. One open power supply slot is available; three different power supplies are available. See power supply products for additional specifications.
	Maximum heat dissipation	2450 BTU/hr (2584.75 kJ/hr), (max. non-PoE); 3700 BTU/hr (3903 kJ/hr) (max. using PoE)
	Voltage	110-127/200-240 VAC
	Idle power	215 W
	Safety	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (serial RS-232C)	
Notes	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (UY909E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware (UY910E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY911E)	
	3-year, 24x7 SW phone support, software updates (UY912E)	
	Installation with minimum configuration, system-based pricing (U4828E)	
	Installation with HP-provided configuration, system-based pricing (U4832E)	
	4-year, 4-hour onsite, 13x5 coverage for hardware (UW452E)	
	4-year, 4-hour onsite, 24x7 coverage for hardware (UW453E)	

Technical Specifications

4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW454E)
4-year, 24x7 SW phone support, software updates (UW455E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UW473E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UW474E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW475E)
5-year, 24x7 SW phone support, software updates (UY938E)
3 Yr 6 hr Call-to-Repair Onsite (UY913E)
4 Yr 6 hr Call-to-Repair Onsite (UW456E)
5 Yr 6 hr Call-to-Repair Onsite (UY939E)
1-year, 4-hour onsite, 13x5 coverage for hardware (HR599E)
1-year, 4-hour onsite, 24x7 coverage for hardware (HR600E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR603E)
1-year, 24x7 software phone support, software updates (HR602E)
1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR601E)
1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS738E)
1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS739E)
3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS740E)
3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS741E)
4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS742E)
4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS743E)
5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS744E)
5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS745E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5412-92G-PoE+-4G v2 Included accessories
zl Switch with Premium
Software (J9540A)

Ports

HP 24-port Gig-T PoE+ v2 zl Module (J9534A)
1 HP 20-port Gig-T PoE+ / 4-port SFP v2 zl Module (J9535A)
2 HP 1500W PoE+ zl Power Supply (J9306A)
92 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
4 open mini-GBIC slots
8 open module slots
Supports a maximum of 32 10-GbE ports or 284 autosensing 10/100/1000 ports or 196 mini-GBICs, or a combination

Technical Specifications

Power supplies	4 power supply slots 2 minimum power supplies required includes: 2 x J9306A (HP 1500W PoE+ zl Power Supply)	
Physical characteristics	Dimensions	17.5(w) x 17.75(d) x 12.1(h) in (44.45 x 45.09 x 30.73 cm) (7U height)
	Weight	74.86 lb (33.96 kg)
Memory and processor	Gigabit Module	ARM9 @ 200 MHz; packet buffer size: 144 Mb QDR SDRAM
	10G module	ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM
	Management Module	Freescale PowerPC 8540 @ 666 MHz, 4 MB flash Mb, 128 MB compact flash, 256 MB DDR SDRAM
Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	1000 Mb Latency	< 3.7 μ s (FIFO 64-byte packets)
	10 Gbps Latency	< 2.1 μ s (FIFO 64-byte packets)
	Throughput	up to 564.2 million pps
	Routing/Switching capacity	758.4 Gbps
	Switch fabric speed	758.4 Gbps
	Routing table size	10000 entries (IPv4), 5000 entries (IPv6)
	MAC address table size	64000 entries
Environment	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 64 dB, Pressure: 57.5 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Description	Two J9306A installed. Two open power supply slots are available; three different power supplies are available. See power supply products for additional specifications.
	Maximum heat dissipation	4900 BTU/hr (5169.5 kJ/hr), (max. non-PoE); 7400 BTU/hr (7807 kJ/hr) (max. using PoE)
	Voltage	110-127/200-240 VAC
	Idle power	312 W
Safety	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950	

Technical Specifications

Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	<p>EN EN 55024, CISPR 24</p> <p>ESD IEC 61000-4-2; 4 kV CD, 8 kV AD</p> <p>Radiated IEC 61000-4-3; 3 V/m</p> <p>EFT/Burst IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)</p> <p>Surge IEC 61000-4-5; 1 kV/2 kV AC</p> <p>Conducted IEC 61000-4-6; 3 V</p> <p>Power frequency magnetic field IEC 61000-4-8; 1 A/m, 50 or 60 Hz</p> <p>Voltage dips and interruptions IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods</p> <p>Harmonics EN 61000-3-2, IEC 61000-3-2</p> <p>Flicker EN 61000-3-3, IEC 61000-3-3</p>
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (serial RS-232C)
Notes	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UY914E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UY915E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY916E)</p> <p>3-year, 24x7 SW phone support, software updates (UW440E)</p> <p>Installation with minimum configuration, system-based pricing (U4828E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4832E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UW457E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UW458E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW459E)</p> <p>4-year, 24x7 SW phone support, software updates (UW460E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UY940E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UY917E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UY918E)</p> <p>5-year, 24x7 SW phone support, software updates (UY919E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW441E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW461E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UY920E)</p> <p>1-year, 4-hour onsite, 13x5 coverage for hardware (HR604E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware (HR605E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR608E)</p> <p>1-year, 24x7 software phone support, software updates (HR607E)</p> <p>1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR606E)</p> <p>1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS746E)</p> <p>1-year, 24x7 software phone support, software updates + 4 hour hardware</p>

Technical Specifications

exchange (HS747E)
 3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)
 3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS748E)
 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS749E)
 4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS750E)
 4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS751E)
 5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS752E)
 5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS753E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 5406 8p 10GBASE-T 8p 10GbE SFP+ v2 zL Switch with Premium Software (J9866A)

Included accessories	1 HP 8-port 10GbE SFP+ v2 zL Module (J9538A) 1 HP 1500W PoE+ zL Power Supply (J9306A) 1 HP 8-port 10GBASE-T v2 zL Module (J9546A)	
Ports	8 RJ-45 10GbE ports (IEEE 802.3an-2006 Type 10GBASE-T) 8 open 10GbE SFP+ transceiver slots 4 open module slots Supports a maximum of 32 10GbE ports or 96 autosensing 10/100/1000 ports or 96 mini-GBICs, or a combination	
Power supplies	2 power supply slots 1 minimum power supply required includes: 1 x J9306A (HP 1500W PoE+ zL Power Supply)	
Physical characteristics	Dimensions	17.5(w) x 17.75(d) x 6.9(h) in (44.45 x 45.09 x 17.53 cm) (4U height)
	Weight	46.08 lb (20.9 kg)
Memory and processor	10G module	ARM9 @ 200 MHz; packet buffer size: 36 Mb QDR SDRAM
	Management Module	Freescale PowerPC 8540 @ 666 MHz, 4 MB flash, 128 MB compact flash, 256 MB DDR SDRAM
Mounting	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	1000 Mb Latency	< 3.7 μs (FIFO 64-byte packets)
	10 Gbps Latency	< 2.1 μs (FIFO 64-byte packets)
	Throughput	up to 282.1 Mpps
	Routing/Switching capacity	379.2 Gb/s
	Switch fabric speed	379.2 Gb/s
	Routing table size	10000 entries (IPv4), 5000 entries (IPv6)

Technical Specifications

Environment	MAC address table size	64000 entries
	Operating temperature	32°F to 131°F (0°C to 55°C); 0°C to 40°C with J8706A or J8707A modules installed
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
	Acoustic	Power: 57 dB, Pressure: 40.2 dB ISO 7779, ISO 9296
Electrical characteristics	Frequency	50/60 Hz
	Description	One J9306A product is installed. One open power supply slot is available; three different power supplies are available. See power supply products for additional specifications.
	Maximum heat dissipation	2450 BTU/hr (2584.75 kJ/hr), (max. non-PoE); 3700 BTU/hr (3903 kJ/hr) (max. using PoE)
	Voltage	110-127/200-240 VAC
	Idle power	215 W
Safety	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (serial RS-232C)	
Notes	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; for example, J9142B, J8177C).	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (UY909E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware (UY910E)	
	3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support	

Technical Specifications

and SW updates (UY911E)
3-year, 24x7 SW phone support, software updates (UY912E)
Installation with minimum configuration, system-based pricing (U4828E)
Installation with HP-provided configuration, system-based pricing (U4832E)
4-year, 4-hour onsite, 13x5 coverage for hardware (UW452E)
4-year, 4-hour onsite, 24x7 coverage for hardware (UW453E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW454E)
4-year, 24x7 SW phone support, software updates (UW455E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UW473E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UW474E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW475E)
5-year, 24x7 SW phone support, software updates (UY938E)
3 Yr 6 hr Call-to-Repair Onsite (UY913E)
4 Yr 6 hr Call-to-Repair Onsite (UW456E)
5 Yr 6 hr Call-to-Repair Onsite (UY939E)
1-year, 4-hour onsite, 13x5 coverage for hardware (HR599E)
1-year, 4-hour onsite, 24x7 coverage for hardware (HR600E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR603E)
1-year, 24x7 software phone support, software updates (HR602E)
1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR601E)
1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS738E)
1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS739E)
3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS740E)
3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS741E)
4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS742E)
4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS743E)
5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS744E)
5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS745E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Standards and protocols BGP

RFC 1997 BGP Communities Attribute
RFC 2918 Route Refresh Capability
RFC 4271 A Border Gateway Protocol 4 (BGP-4)
RFC 4456 BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP)
RFC 5492 Capabilities Advertisement with BGP-4

Technical Specifications

Device Management	RFC 1591 DNS (client) HTML and telnet management
General Protocols	IEEE 802.1ad Q-in-Q IEEE 802.1AX-2008 Link Aggregation IEEE 802.1D MAC Bridges IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1s Multiple Spanning Trees IEEE 802.1v VLAN classification by Protocol and Port IEEE 802.1w Rapid Reconfiguration of Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3af Power over Ethernet IEEE 802.3x Flow Control RFC 768 UDP RFC 783 TFTP Protocol (revision 2) RFC 792 ICMP RFC 793 TCP RFC 826 ARP RFC 854 TELNET RFC 868 Time Protocol RFC 951 BOOTP RFC 1058 RIPv1 RFC 1350 TFTP Protocol (revision 2) RFC 1519 CIDR RFC 1542 BOOTP Extensions RFC 2030 Simple Network Time Protocol (SNTP) v4 RFC 2131 DHCP RFC 2453 RIPv2 RFC 2548 (MS-RAS-Vendor only) RFC 3046 DHCP Relay Agent Information Option RFC 3576 Ext to RADIUS (CoA only) RFC 3768 VRRP RFC 4675 RADIUS VLAN & Priority UDLD (Uni-directional Link Detection)
IP Multicast	RFC 3376 IGMPv3 (host joins only) RFC 3973 PIM Dense Mode RFC 4601 PIM Sparse Mode
IPv6	RFC 1981 IPv6 Path MTU Discovery RFC 2375 IPv6 Multicast Address Assignments RFC 2460 IPv6 Specification RFC 2464 Transmission of IPv6 over Ethernet Networks RFC 2710 Multicast Listener Discovery (MLD) for IPv6 RFC 2925 Definitions of Managed Objects for Remote Ping, Traceroute, and Lookup Operations

Technical Specifications

(Ping only)
RFC 3019 MLDv1 MIB
RFC 3315 DHCPv6 (client and relay)
RFC 3484 Default Address Selection for IPv6
RFC 3587 IPv6 Global Unicast Address Format
RFC 3596 DNS Extension for IPv6
RFC 3810 MLDv2 for IPv6
RFC 4022 MIB for TCP
RFC 4087 IP Tunnel MIB
RFC 4113 MIB for UDP
RFC 4213 Basic Transition Mechanisms for IPv6
Hosts and Routers
RFC 4251 SSHv6 Architecture
RFC 4252 SSHv6 Authentication
RFC 4253 SSHv6 Transport Layer
RFC 4254 SSHv6 Connection
RFC 4291 IP Version 6 Addressing Architecture
RFC 4293 MIB for IP
RFC 4294 IPv6 Node Requirements
RFC 4419 Key Exchange for SSH
RFC 4443 ICMPv6
RFC 4541 IGMP & MLD Snooping Switch
RFC 4861 IPv6 Neighbor Discovery
RFC 4862 IPv6 Stateless Address Auto-configuration
RFC 5095 Deprecation of Type 0 Routing Headers in IPv6
RFC 5340 OSPFv3 for IPv6
RFC 5453 Reserved IPv6 Interface Identifiers
RFC 5519 Multicast Group Membership Discovery MIB (MLDv2 only)
RFC 5722 Handling of Overlapping IPv6 Fragments

MIBs

IEEE 802.1ap (MSTP and STP MIB's only)
RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 1724 RIPv2 MIB
RFC 1850 OSPFv2 MIB
RFC 2021 RMONv2 MIB
RFC 2096 IP Forwarding Table MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2620 RADIUS Accounting MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 2737 Entity MIB (Version 2)
RFC 2787 VRRP MIB
RFC 2863 The Interfaces Group MIB
RFC 2925 Ping MIB
RFC 2933 IGMP MIB

Technical Specifications

Network Management	IEEE 802.1AB Link Layer Discovery Protocol (LLDP) RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events) RFC 3176 sFlow ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED) SNMPv1/v2c/v3 XRMON
OSPF	RFC 2328 OSPFv2 RFC 3101 OSPF NSSA RFC 5340 OSPFv3 for IPv6
QoS/CoS	RFC 2474 DiffServ Precedence, including 8 queues/port RFC 2597 DiffServ Assured Forwarding (AF) RFC 2598 DiffServ Expedited Forwarding (EF)
Security	IEEE 802.1X Port Based Network Access Control RFC 1492 TACACS+ RFC 2865 RADIUS (client only) RFC 2866 RADIUS Accounting RFC 3579 RADIUS Support For Extensible Authentication Protocol (EAP) Secure Sockets Layer (SSL) SSHv2 Secure Shell

Accessories

HP 5400 zl Switch Series accessories	Modules	
	HP 8-port 10GBase-T v2 zl Module	J9546A
	HP 4-Port 10 GbE CX4 zl Module	J8708A
	HP 4-Port 10 GbE X2 zl Module	J8707A
	HP 4-Port 10 GbE SFP+ zl Module	J9309A
	HP 8-port 10 GbE SFP+ v2 zl Module	J9538A
	HP 20-port Gig-T PoE+/2-port 10-GbE SFP+ v2 zl Module	J9536A
	HP 20-port Gig-T PoE+/4-port SFP v2 zl Module	J9535A
	HP 24-port SFP v2 zl Module	J9537A
	HP 12-port Gig-T PoE+/12-port SFP v2 zl Module	J9637A
	HP 24-Port 10/100/1000 PoE zl Module	J8702A
	HP 20-Port 10/100/1000 PoE+/4-Port Mini-GBIC zl Module	J9308A
	HP 20-Port Gig-T/4-Port Mini-GBIC zl Module	J8705A
	HP 24-Port Mini-GBIC zl Module	J8706A
	HP 24-Port 10/100/1000 PoE+ zl Module	J9307A
	HP 24-port Gig-T PoE+ v2 zl Module	J9534A
	HP 24-Port 10/100 PoE+ zl Module	J9478A
	HP 24-port 10/100 PoE+ v2 zl Module	J9547A
	HP 24-port Gig-T v2 zl Module	J9550A
	HP 20-port Gig-T/4-port SFP v2 zl Module	J9549A
	HP 20-port Gig-T/2-port 10-GbE SFP+ v2 zl Module	J9548A
	HP Extended Services zl Module with Riverbed Steelhead RiOS™ Application	J9517A
	HP Survivable Branch Communication zl Module powered by Microsoft® Lync	J9485A
	HP Services zl Module for Avaya Aura Session Border Controller powered by Acme Packet	J9486A
	NEW HP Advanced Services v2 zl Module with HDD	J9857A
	HP Advanced Services v2 zl Module with SSD	J9858A
	Transceivers	
	HP X131 10G X2 SC ER Transceiver	J8438A
	HP X130 CX4 Optical Media Converter	J8439A
	HP X131 10G X2 SC SR Transceiver	J8436A
	HP X131 10G X2 CX4 Transceiver	J8440C
	HP X111 100M SFP LC FX Transceiver	J9054B
	HP X131 10G X2 SC LR Transceiver	J8437A
	HP X131 10G X2 SC LRM Transceiver	J9144A
	HP X112 100M SFP LC BX-D Transceiver	J9099B
	HP X112 100M SFP LC BX-U Transceiver	J9100B
	HP X132 10G SFP+ LC SR Transceiver	J9150A
	HP X132 10G SFP+ LC LR Transceiver	J9151A
	HP X132 10G SFP+ LC LRM Transceiver	J9152A

Accessories

HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X132 10G SFP+ LC ER Transceiver	J9153A

Cables

HP X242 SFP+ SFP+ 1 m Direct Attach Cable	J9281B
HP X242 SFP+ SFP+ 3 m Direct Attach Cable	J9283B
HP X242 SFP+ SFP+ 7 m Direct Attach Cable	J9285B
HP X242 SFP+ to SFP+ 10m Direct Attach Copper Cable	J9286B
HP X242 SFP+ to SFP+ 15m Direct Attach Copper Cable	J9287B
HP X244 XFP SFP+ 1 m Direct Attach Cable	J9300A
HP X244 XFP SFP+ 3 m Direct Attach Cable	J9301A
HP X244 XFP SFP+ 5 m Direct Attach Cable	J9302A
HP 0.5 m Multimode OM3 LC/LC Optical Cable	AJ833A
HP 1 m Multimode OM3 LC/LC Optical Cable	AJ834A
HP 2 m Multimode OM3 LC/LC Optical Cable	AJ835A
HP 5 m Multimode OM3 LC/LC Optical Cable	AJ836A
HP 15 m Multimode OM3 LC/LC Optical Cable	AJ837A
HP 30 m Multimode OM3 LC/LC Optical Cable	AJ838A
HP 50 m Multimode OM3 LC/LC Optical Cable	AJ839A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
HP Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A
HP X242 10G SFP+ to SFP+ 10m Direct Attach Copper Cable	J9286B
HP X242 10G SFP+ to SFP+ 15m Direct Attach Copper Cable	J9287B

Power Supply

HP 1500 W PoE+ zl Power Supply	J9306A
HP 1500 W zl Power Supply	J8713A
HP 875 W zl Power Supply	J8712A

EPS/RPS

HP zl Power Supply Shelf	J8714A
--------------------------	--------

License

HP MSM760/765 40-Access Point License	J9371A
HP 5400 zl Switch Premium License	J8994A

WLAN



Accessories

NEW HP MSM775 zl Premium Controller Module

J9840A

[HP MSM765zl Mobility Controller](#)

J9370A

Accessory Product Details

NOTE: Details are not available for all accessories. The following specifications were available at the time of publication.

HP 8-port 10GBase-T v2 zl Module (J9546A)	Physical characteristics	Ports	8 RJ-45 10-GbE ports; Duplex: full only
		Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
		Weight	2.1 lb. (0.95 kg)
	Environment	Full configuration weight	2.1 lb. (0.95 kg)
		Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
		Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
		Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
	Notes	Fiber type	Single Mode
		Max Distance upto 100m with qualified 10Gbase-T Cat7(Shielded), Cat6a (Shielded/Unshielded) and Cat6 (Shielded, tested to 350Mhz TIA/EIA TSB-155A) cables. Max Distance upto 55m with Cat6 (unshielded, tested to 350Mhz TIA/EIA TSB-155A)	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP 4-Port 10 GbE CX4 zl Module (J8708A)	Physical characteristics	Ports	4 CX4 10-GbE ports (IEEE 802.3ak Type 10GBASE-CX4); Duplex: full only
		Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Environment	Weight	1.74 lb. (0.79 kg)
		Operating temperature	32°F to 131°F (0°C to 55°C)
	Cabling	Maximum distance: <ul style="list-style-type: none"> • 15 m using CX4 cable • 300 m using optical media converters and multimode fiber cable 	
	Notes	Use CX4 10-GbE cable (0.5 m-15 m) or HP ProCurve 10-GbE CX4 Media Converter (J8439A). No CX4 cables are included with this module.	
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP 4-Port 10 GbE X2 zl Module (J8707A)	Ports	4 open 10-GbE X2 transceiver slots
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 1.74 lb. (0.79 kg)
	Environment	Operating temperature 32°F to 104°F (0°C to 40°C)
	Notes	When installed in a zl chassis, the J8707A module limits the operating temperature range of the chassis to 32°F to 104°F (0°C to 40°C).
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 4-Port 10 GbE SFP+ zl Module (J9309A)	Ports	4 open 10-GbE SFP+ transceiver slots
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 1.64 lb. (0.74 kg)
	Environment	Operating temperature 32°F to 131°F (0°C to 55°C) Operating relative humidity 15% to 95% @ 113°F (45°C), noncondensing Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C) Nonoperating/Storage relative humidity 15% to 95% @ 158°F (70°C), noncondensing
	Notes	When installed in a zl chassis, the J9309A module limits the operating temperature range of the chassis to 32°F to 113°F (0°C to 45°C).
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 8-port 10 GbE SFP+ v2 zl Module (J9538A)	Ports	8 open 10-GbE SFP+ transceiver slots
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 2.09 lb (0.95 kg)
	Environment	Operating temperature 32°F to 131°F (0°C to 55°C) Operating relative humidity 15% to 95% @ 131°F (55°C), noncondensing Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C) Nonoperating/Storage relative humidity 15% to 95% @ 158°F (70°C), noncondensing

Accessory Product Details

Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9538A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 20-port Gig-T PoE+/2-port 10-GbE SFP+ v2 zl Module (J9536A)

Ports	2 open 10-GbE SFP+ transceiver slots 20 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only								
Physical characteristics	<table> <tr> <td>Dimensions</td> <td>10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)</td> </tr> <tr> <td>Weight</td> <td>2.1 lb. (0.95 kg)</td> </tr> </table>	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)	Weight	2.1 lb. (0.95 kg)				
Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)								
Weight	2.1 lb. (0.95 kg)								
Environment	<table> <tr> <td>Operating temperature</td> <td>32°F to 131°F (0°C to 55°C)</td> </tr> <tr> <td>Operating relative humidity</td> <td>15% to 95% @ 131°F (55°C), noncondensing</td> </tr> <tr> <td>Nonoperating/Storage temperature</td> <td>-40°F to 158°F (-40°C to 70°C)</td> </tr> <tr> <td>Nonoperating/Storage relative humidity</td> <td>15% to 95% @ 158°F (70°C), noncondensing</td> </tr> </table>	Operating temperature	32°F to 131°F (0°C to 55°C)	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
Operating temperature	32°F to 131°F (0°C to 55°C)								
Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing								
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)								
Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing								
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;								
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9308A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).								
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.								

Accessory Product Details

HP 20-port Gig-T PoE+/4-port SFP v2 zl Module (J9535A)

4 open mini-GBIC (SFP) slots
 20 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only

Physical characteristics **Dimensions** 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)

Weight 2.1 lb. (0.95 kg)

Environment **Operating temperature** 32°F to 131°F (0°C to 55°C)

Operating relative humidity 15% to 95% @ 131°F (55°C), noncondensing

Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C)

Nonoperating/Storage relative humidity 15% to 95% @ 158°F (70°C), noncondensing

Cabling Cable type:
 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;

Notes When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.

When mini-GBICs are inserted in any mini-GBIC slot of a J9308A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 24-port SFP v2 zl Module (J9537A)

Ports 24 open mini-GBIC (SFP) slots

Physical characteristics **Dimensions** 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)

Weight 2.01 lb. (0.91 kg)

Notes When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.

When installed in a zl chassis, the J8706A module limits the operating temperature range of the chassis to 32°F to 104°F (0°C to 40°C).

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 12-port Gig-T PoE+/12-port SFP v2 zl Module (J9637A)	Ports	12 open mini-GBIC (SFP) slots 12 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 2.1 lb. (0.95 kg)
	Environment	Operating temperature 32°F to 131°F (0°C to 55°C) Operating relative humidity 15% to 95% @ 131°F (55°C), noncondensing Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C) Nonoperating/Storage relative humidity 15% to 95% @ 158°F (70°C), noncondensing
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T
	Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9308A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 24-port 10/100/1000 PoE zl Module (J8702A)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 2.16 lb. (0.98 kg)
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 20-Port 10/100/1000 PoE+/4-Port Mini-GBIC zl Module (J9308A)	Ports	4 open mini-GBIC (SFP) slots 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.1 lb. (0.95 kg)
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9308A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 20-port Gig-T / 4-port Mini-GBIC zl Module (J8705A)	Ports	4 open mini-GBIC (SFP) slots 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.2 lb. (1 kg)
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J8705A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).	
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP 24-port Mini-GBIC zl Module (J8706A)	Ports	24 open mini-GBIC (SFP) slots
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 2.01 lb. (0.91 kg)
	Notes	<p>When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.</p> <p>When installed in a zl chassis, the J8706A module limits the operating temperature range of the chassis to 32°F to 104°F (0°C to 40°C).</p>
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 24-Port 10/100/1000 PoE+ zl Module (J9307A)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	Physical characteristics	Dimensions 10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm) Weight 2.0 lb. (0.98 kg)	
	Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
		Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
		Nonoperating/Storage relative humidity	15% to 95% @ 149°F (-40°C), noncondensing
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

HP 24-port Gig-T PoE+ v2 Ports zl Module (J9534A)

24 RJ-45 autosensing 10/100/1000 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only

Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.0 lb. (0.98 kg)
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Nonoperating/Storage relative humidity		15% to 95% @ 149°F (-40°C), noncondensing
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 24-Port 10/100 PoE+ zl Ports Module (J9478A)

24 RJ-45 autosensing 10/100 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Media Type: Auto-MDIX; Duplex: half or full

Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.0 lb. (0.98 kg)
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Nonoperating/Storage relative humidity		15% to 95% @ 158°F (70°C), noncondensing
Cabling	Cable type: 100BASE-TX: Category 5 (or better), 100 0 unshielded twisted pair (UTP) or shielded twisted pair (STP), complying with IEEE 802.3u 100BASE-TX;	
	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP 24-port 10/100 PoE+ v2 zl Module (J9547A)	Ports	24 RJ-45 autosensing 10/100 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: half or full	
	Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
Environment	Weight	2.0 lb. (0.98 kg)	
	Operating temperature	32°F to 131°F (0°C to 55°C)	
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing	
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	
Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing		
	Cabling	Cable type: 100BASE-TX: Category 5 (or better), 100 Ω differential unshielded twisted pair (UTP) or shielded twisted pair (STP), complying with IEEE 802.3u 100BASE-TX;	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP 24-port Gig-T v2 zl Module (J9550A)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
Environment	Weight	2.0 lb. (0.98 kg)	
	Operating temperature	32°F to 131°F (0°C to 55°C)	
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing	
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	
Nonoperating/Storage relative humidity	15% to 95% @ 149°F (-40°C), noncondensing		
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

HP 20-port Gig-T/4-port SFP v2 zl Module (J9549A)	Ports	4 open mini-GBIC (SFP) slots 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.1 lb. (0.95 kg)
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9549A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 20-port Gig-T/2-port 10-GbE SFP+ v2 zl Module (J9548A)	Ports	2 open 10-GbE SFP+ transceiver slots 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.1 lb. (0.95 kg)
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 0 differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;	

Accessory Product Details

Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required. When mini-GBICs are inserted in any mini-GBIC slot of a J9308A, this limits the operating temperature range of the chassis to 32F to 104F (0C to 40C).
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP Extended Services zl Module with Riverbed Steelhead RiOS™ Application (J9517A)

Physical characteristics	Dimensions	9.75(d) x 8.13(w) x 3.5(h) in. (24.77 x 20.65 x 8.89 cm)
	Weight	4.5 lb. (2.04 kg)
Environment	Operating temperature	32°F to 122°F (0°C to 50°C); Important: See NOTE for 50°C temperature spec rules
	Operating relative humidity	15% to 90% @ 122°F (50°C), non-condensing
	Non-operating/ Storage temperature	14°F to 149°F (-10°C to 65°C)
	Non-operating/ Storage relative humidity	15% to 95% @ 149°F (65°C), non-condensing
	Altitude	up to 10,000 ft. (3 km)
Notes	<p>5400 series switches operating temperature specifications apply to when the services module is installed; 40°C when any services module is installed in the right side of the chassis, and 50°C when all services modules are installed in the left side.</p> <p>Up to four services modules can be installed in a 5412zl/8212zl chassis simultaneously.</p> <p>When the services module is installed, the maximum relative humidity for the switch drops from 95% to 90%.</p> <p>This product does not support Riverbed Services Platform (RSP) functionality.</p>	
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UZ154E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UZ155E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UZ156E)</p> <p>3-year, 24x7 SW phone support, software updates (UZ157E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UZ158E)</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	

Accessory Product Details

HP Survivable Branch Communication zL Module powered by Microsoft® Lync (J9485A)

Ports	1 USB 2.0	
Physical characteristics	Dimensions	9.75(d) x 8.13(w) x 3.5(h) in. (24.77 x 20.65 x 8.89 cm)
	Weight	4.5 lb. (2.04 kg)
Environment	Operating temperature	32°F to 122°F (0°C to 50°C); Important: See note for 50°C temperature spec rules
	Operating relative humidity	15% to 90% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	14°F to 149°F (-10°C to 65°C)
	Nonoperating/Storage relative humidity	15% to 90% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft. (3 km)
Notes	<p>HP 5400 zL chassis operating temperature specifications when the services module is installed: 45°C when any services module is installed in the right side of the chassis, 50°C when all services modules are installed in the left side of the chassis.</p> <p>Up to four services modules can be installed in an HP 5412 zL/8212 zL Switch chassis simultaneously. Up to two services modules can be installed in an HP 5406 zL/8206 zL Switch chassis simultaneously.</p> <p>When the services module is installed, the maximum relative humidity for the switch drops from 95% to 90%.</p>	
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UY932E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UY933E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY934E)</p> <p>3-year, 24x7 SW phone support, software updates (UY935E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UY936E)</p> <p>Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	

HP Services zL Module for Avaya Aura Session Border Controller powered by Acme Packet (J9486A)

Physical characteristics	Dimensions	9.75(d) x 8.13(w) x 3.5(h) in. (24.77 x 20.65 x 8.89 cm)
	Weight	4.5 lb. (2.04 kg)
Environment	Operating temperature	32°F to 122°F (0°C to 50°C); Important: See note for 50°C temperature spec rules
	Operating relative humidity	15% to 90% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	14°F to 149°F (-10°C to 65°C)
	Nonoperating/Storage relative humidity	15% to 90% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft. (3 km)
Notes	<p>HP 5400zL chassis operating temperature specifications when the services module is installed: 45°C when any services module is installed in the right side of the chassis, 50°C when all services modules are</p>	

Accessory Product Details

installed in the left side of the chassis.

Up to four services modules can be installed in an HP 5412zL/8212zL Switch chassis simultaneously.

Up to two services modules can be installed in an HP 5406zL/8206zL Switch chassis simultaneously.

When the services module is installed, the maximum relative humidity for the switch drops from 95% to 90%.

The SBC software and licenses are procured from Avaya or Avaya authorized resellers.

This product does not support Avaya Aura SBC HA functionality.

Services

3-year, 4-hour onsite, 13x5 coverage for hardware (UY492E)

3-year, 4-hour onsite, 24x7 coverage for hardware (UY493E)

3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UY494E)

3-year, 24x7 SW phone support, software updates (UY496E)

3 Yr 6 hr Call-to-Repair Onsite (UY495E)

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP Advanced Services v2 zL Module with HDD (J9857A)

Physical characteristics	Dimensions	8.13(w) x 9.75(d) x 1.75(h) in (20.65 x 24.77 x 4.45 cm) (1U height)
	Weight	3.00 lb (1.36 kg)
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 90% @ 149°F (65°C), noncondensing
	Altitude	up to 9,842 ft (3 km)
Electrical characteristics	Maximum heat dissipation	133/287 BTU/hr (140.32/302.78 kJ/hr)
	Idle power	84 W
	Maximum power rating	39 W
Management	command-line interface	
Notes	<p>The services module can be used with VMware certified applications.</p> <ul style="list-style-type: none"> • The HDD has a maximum operational wet bulb temperature of 28°C • The HDD has a maximum non-operational wet bulb temperature of 28°C • Up to four services modules can be installed in a 5406 zL chassis. There are no restrictions on where the modules can go in the chassis • Up to three services modules can be installed in an 8206 zL chassis. There are no restrictions on where the modules can go in the chassis • Up to six services modules can be installed in a 5412 or 8212 zL chassis. There are no restrictions on where the modules can go in the chassis 	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP Advanced Services v2 zl Module with SSD (J9858A)

Physical characteristics	Dimensions	8.13(w) x 9.75(d) x 1.75(h) in (20.65 x 24.77 x 4.45 cm) (1U height)
	Weight	2.75 lb (1.36 kg)
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 90% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft (3 km)
Electrical characteristics	Maximum heat dissipation	133/290 BTU/hr (140.32/280.63 kJ/hr)
	Idle power	85 W
	Maximum power rating	37 W
Management	command-line interface	
Notes	The services module can be used with VMware certified applications. <ul style="list-style-type: none">• The SSD has a maximum operational wet bulb temperature of 28°C• The SSD has a maximum non-operational wet bulb temperature of 28°C• Up to four services modules can be installed in a 5406 zl chassis. There are no restrictions on where the modules can go in the chassis• Up to three services modules can be installed in an 8206 zl chassis. There are no restrictions on where the modules can go in the chassis• Up to six services modules can be installed in a 5412 or 8212 zl chassis. There are no restrictions on where the modules can go in the chassis	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP X131 10G X2 SC ER Transceiver (J8438A) HP X131 10G X2 SC ER Transceiver: An X2 format 10-gigabit transceiver with SC connectors using ER technology.	Ports Connectivity	1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-ER); Duplex: full only Connector type SC
	Physical characteristics	Wavelength 1550 nm Dimensions 3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm) Weight 0.35 lb. (0.16 kg) Transceiver form factor X2
	Environment	Operating temperature 32°F to 104°F (0°C to 40°C) Operating relative humidity 15% to 95%, noncondensing
	Electrical characteristics	Power consumption typical 3 W Power consumption maximum 4.5 W
	Cabling	Cable type:: Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1; Cable length 2m to 30km (max 40km on engineered links) Fiber type Single Mode
	Notes	Conditioning patch cord cables are not supported For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X130 CX4 Optical Media Converter (J8439A) An optical media converter that connects to CX4 ports, providing 10-Gigabit connectivity up to 300 m on multimode fiber.	Physical characteristics	Dimensions: 2.83(d) x 0.98(w) x 0.59(h) in. (7.19 x 2.49 x 1.5 cm) Weight: 0.06 lb. (0.03 kg)
	Cabling	Maximum distance: <ul style="list-style-type: none"> ● 62.5 µm multimode cable @ 150 MHz*km = 1-50 meters ● 50 µm multimode cable @ 500 MHz*km = 1-100 meters ● 50 µm multimode cable @ 2000 MHz*km = 1-300 meters
	Notes	Duplex: full The CX4 Media Converter connects directly to the CX4 port, and a 12-strand multimode ribbon cable is used between CX4 Media Converters. The 12-strand multimode ribbon cable can have either 62.5 or 50 micron core diameters, terminated by standard Multiple Terminations Push-pull Latch (MTP) connectors in a crossover configuration. The ribbon cables are known as Multi-fiber Push (MPO). Users should specify a "crossover" (often called "key up/key up") configuration for the ribbon cable. Also, specify female-female cables to connect to HP 10-GbE CX4 Media Converters.

Accessory Product Details

Services	<p>For a suggested vendor of MPO ribbon cables, please see the "Cabling" answers on the "HP 10-GbE Transceivers</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
-----------------	--

<p>HP X131 10G X2 SC SR Transceiver (J8436A)</p> <p>HP X131 10G X2 SC SR Transceiver: An X2 format 10-gigabit transceiver with SC connectors using SR technology.</p>	<p>Ports</p> <p>1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-SR); Duplex: full only</p>
Connectivity	<p>Connector type SC</p>
Physical characteristics	<p>Wavelength 850 nm</p> <p>Dimensions 3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm)</p> <p>Weight 0.35 lb. (0.16 kg)</p> <p>Transceiver form factor X2</p>
Environment	<p>Operating temperature 32°F to 158°F (0°C to 70°C)</p> <p>Operating relative humidity 0% to 95%, noncondensing</p> <p>Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)</p> <p>Nonoperating/Storage relative humidity 0% to 95%, noncondensing</p> <p>Altitude up to 10,000 ft. (3 km)</p>
Electrical characteristics	<p>Power consumption typical 1.7 W</p> <p>Power consumption maximum 2.4 W</p>
Cabling	<p>Cable type:: 62.5/125 µm or 50/125 µm (core/cladding) graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> ● 2-26m with 62.5 µm multimode cable @ 160 MHz*km ● 2-33m with 62.5 µm multimode cable @ 200 MHz*km ● 2-66m with 50 µm multimode cable @ 400 MHz*km ● 2-82m with 50 µm multimode cable @ 500 MHz*km ● 2-300m with 50 µm multimode cable @ 2000 MHz*km <p>Cable length 2-300m</p> <p>Fiber type Multi Mode</p>
Notes	For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X131 10G X2 CX4 Transceiver (J8440C) HP X131 10G X2 CX4 Transceiver: An X2 format 10-gigabit CX4 transceiver.	Ports	1 CX4 10-GbE port (IEEE 802.3ak Type 10GBASE-CX4); Duplex: full only
	Connectivity	Connector type CX4
	Physical characteristics	Dimensions 3.54(d) x 1.42(w) x 0.53(h) in. (8.99 x 3.61 x 1.35 cm)
		Weight 0.18 lb. (0.08 kg)
	Environment	Operating temperature 32°F to 131°F (0°C to 55°C)
		Operating relative humidity 15% to 95% @ 149°F (65°C), non-condensing
	Cabling	Maximum distance: <ul style="list-style-type: none"> • 15 m using CX4 cables • 300 m using optical media converters and multimode fiber cable
	Notes	Use CX4 10-GbE cable (0.5-15 m) or ProCurve 10-GbE CX4 Media Converter (J8439A). Includes a single 0.5 m cable.
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X111 100M SFP LC FX Transceiver (J9054B) HP X111 100M SFP LC FX Transceiver: An SFP format 100-megabit transceiver with LC connectors using FX technology.	Ports	1 LC 100BASE-FX port (IEEE 802.3u Type 100BASE-FX); Duplex: half or full
	Physical characteristics	Dimensions: 2.7(d) x 0.54(w) x 0.48(h) in. (6.86 x 1.38 x 1.22 cm) Weight: 0.06 lb. (0.03 kg)
	Environment	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 95% Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 5% to 85% Altitude: up to 10,000 ft. (3 km)
	Cabling	Type: <ul style="list-style-type: none"> • 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Maximum distance: <ul style="list-style-type: none"> • 2 km (full duplex) or 412 m (half duplex)
	Notes	Transmitter wavelength: 1310nm Power consumption is 1.1 watt maximum. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9054B 100-FX SFP-LC Transceiver" on the "HP Mini-GBICs and SFPs" Manuals Web page.
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

<p>HP X131 10G X2 SC LR Transceiver (J8437A)</p> <p>An X2 form-factor transceiver that supports the 10-Gigabit LR standard, providing 10-Gigabit connectivity up to 10 km on single-mode fiber.</p>	Ports	1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-LR); Duplex: full only	
	Connectivity	Connector type SC	
	Physical characteristics	Wavelength	1310 nm
		Dimensions	3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm)
		Weight	0.35 lb. (0.16 kg)
	Environment	Transceiver form factor	X2
		Operating temperature	32°F to 104°F (0°C to 40°C)
		Operating relative humidity	15% to 95%, noncondensing
		Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)
	Electrical characteristics	Altitude	up to 10,000 ft. (3 km)
		Power consumption typical	2 W
		Power consumption maximum	3 W
	Cabling	<p>Cable type:: Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> • 10 km 	
Cable length		2m to 10km with 9/125 im single-mode cable	
	Fiber type	Single Mode	
Notes	<p>Conditioning patch cord cables are not supported For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended</p>		
Services	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>		

Accessory Product Details

HP X131 10G X2 SC LRM Transceiver (J9144A)

An X2 form-factor transceiver that supports the 10-Gigabit LRM standard, providing 10-Gigabit connectivity up to 220 m on legacy multimode fiber.

Ports	1 SC 10-GbE port (IEEE 802.3aq Type 10GBASE-LRM); Duplex: full only
Physical characteristics	<p>Dimensions 3.54(d) x 1.59(w) x 0.7(h) in. (9.0 x 4.05 x 1.78 cm)</p> <p>Weight 0.35 lb. (0.16 kg)</p> <p>Transceiver form factor X2</p>
Environment	<p>Operating temperature 32°F to 158°F (0°C to 70°C)</p> <p>Operating relative humidity 0% to 95%, noncondensing</p> <p>Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)</p> <p>Altitude up to 10,000 ft. (3 km)</p>
Electrical characteristics	<p>Power consumption typical 3.2 W</p> <p>Power consumption maximum 4.2 W</p>
Cabling	<p>Cable type: 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively (a mode conditioning patch cord may be needed in some multimode fiber installations);</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> • 0.5-220m with 62.5 µm multimode cable @ 160/500 MHz*km • 0.5-220m with 62.5 µm multimode cable @ 200/500 MHz*km • 0.5-100m with 50 µm multimode cable @ 400/400 MHz*km • 0.5-220m with 50 µm multimode cable @ 500/500 MHz*km • 0.5-220m with 50 µm multimode cable @ 1500/500 MHz*km <p>Cable length .5m to 220m</p> <p>Fiber type Multi Mode</p>
Notes	<p>Wavelength: 1310nm</p> <p>For OM3 cable (50 im multimode @ 1500/500 MHz*km), a mode-conditioning patch cord is not required. Other multimode cables may require mode-conditioning patch cords to achieve the maximum distances listed above.</p> <p>For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9144A 10-GbE X2-SC LRM Optic" on the "HP 10-GbE Transceivers" Manuals Web page.</p> <p>Power Consumption: 4W Max</p>
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X112 100M SFP LC BX-D Ports Transceiver (J9099B)

A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "downstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device.

Physical characteristics	Dimensions	1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-D); Duplex: full only 2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm)
Environment	Weight	0.04 lb. (0.03 kg)
Cabling	Operating temperature	32°F to 158°F (0°C to 70°C)
Notes	Operating relative humidity	0% to 95%, noncondensing
Services	Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)
	Type:	Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance:	<ul style="list-style-type: none"> • 0.5-10,000 m (single-mode fiber)
		Transmit wavelength: 1550 nm. Receive wavelength: 1310 nm. Power consumption is 1.1 watt maximum. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page. The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device. (A 100-BX-D transceiver can only connect to a 100-BX-U product. You cannot connect two 100-BX-D transceivers together.)

HP X112 100M SFP LC BX-U Ports Transceiver (J9100B)

A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "upstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10-D ("downstream") device.

Physical characteristics	Dimensions	1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-U); Duplex: full only 2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm)
Environment	Weight	0.07 lb. (.03 kg)
Cabling	Operating temperature	32°F to 158°F (0°C to 70°C)
	Operating relative humidity	0% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)
	Type:	Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance:	

Accessory Product Details

Notes	<ul style="list-style-type: none"> 0.5-10,000 m (single-mode fiber) <p>For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.</p> <p>The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10- D ("downstream") device. (A 100-BX-U transceiver can only connect to a 100-BX-D product. You cannot connect two 100-BX-U transceivers together.)</p> <p>Transmit wavelength: 1310 nm. Receive wavelength: 1550 nm. Power consumption is 1.1 watts maximum.</p>
Services	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>

HP X132 10G SFP+ LC SR Transceiver (J9150A)

A 10-Gigabit transceiver in SFP+ form-factor that supports the 10-Gigabit SR standard, providing 10-Gigabit connectivity up to 300 m on multimode fiber.

Ports	1 LC 10-GbE port (IEEE 802.3ae Type 10Gbase-SR); Duplex: full only
Connectivity	Connector type LC
Physical characteristics	Wavelength 850 nm
Environment	Dimensions 2.19(d) x 0.54(w) x 0.47(h) in. (5.57 x 1.38 x 1.19 cm)
Electrical characteristics	Weight 0.04 lb. (0.02 kg)
Cabling	Transceiver form factor SFP+
	Operating temperature 32°F to 158°F (0°C to 70°C)
	Operating relative humidity 0% to 85%, noncondensing
	Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)
	Altitude up to 10,000 ft. (3 km)
	Power consumption typical 0.6 W
	Power consumption maximum 0.8 W
	<p>Cable type: 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Maximum distance:</p> <ul style="list-style-type: none"> 2-26m with 62.5 µm multimode cable @ 160 MHz*km 2-33m with 62.5 µm multimode cable @ 200 MHz*km 2-66m with 50 µm multimode cable @ 400 MHz*km 2-82m with 50 µm multimode cable @ 500 MHz*km 2-300m with 50 µm multimode cable @ 2000 MHz*km
	Cable length 2-300m
	Fiber type Multi Mode

Accessory Product Details

Notes	For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X132 10G SFP+ LC LR Transceiver (J9151A)

A 10-Gigabit transceiver in SFP+ form-factor that supports the 10-Gigabit LR standard, providing 10-Gigabit connectivity up to 10 km on single-mode fiber.

Ports	1 LC 10-GbE port (IEEE 802.3ae Type 10Gbase-LR); Duplex: full only
Connectivity	Connector type LC
Physical characteristics	Wavelength 1310 nm
	Dimensions 2.19(d) x 0.54(w) x 0.47(h) in. (5.57 x 1.38 x 1.19 cm)
	Weight 0.04 lb. (.02 kg)
Environment	Transceiver form factor SFP+
	Operating temperature 32°F to 158°F (0°C to 70°C)
	Operating relative humidity 0% to 85%, noncondensing
	Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)
Electrical characteristics	Altitude up to 10,000 ft. (3 km)
	Power consumption typical 0.9 W
	Power consumption maximum 1 W
Cabling	Cable type: Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1; Maximum distance: <ul style="list-style-type: none"> • 2m-10km with 9/125 µm single-mode cable Cable length 2m to 10km Fiber type Single Mode
Notes	Conditioning patch cord cables are not supported. For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X132 10G SFP+ LC LRM Transceiver (J9152A)	Ports	1 LC 10-GbE port (IEEE 802.3aq Type 10Gbase-LRM); Duplex: full only
	Connectivity	Connector type LC
<p>A 10-Gigabit transceiver in SFP+ form-factor that supports the 10-Gigabit LRM standard, for 10-Gigabit connectivity up to 220 m on legacy multimode fiber.</p>	Physical characteristics	Wavelength 1310 nm
		Dimensions 2.19(d) x 0.54(w) x 0.47(h) in. (5.57 x 1.38 x 1.19 cm)
		Weight 0.04 lb. (.02 kg)
	Environment	Transceiver form factor SFP+
		Operating temperature 32°F to 158°F (0°C to 70°C)
		Operating relative humidity 0% to 85%, noncondensing
		Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)
		Altitude up to 10,000 ft. (3 km)
Electrical characteristics	Power consumption typical	0.7 W
	Power consumption maximum	1 W
Cabling	<p>Cable type: 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively (a mode conditioning patch cord may be needed in some multimode fiber installations); Maximum distance:</p> <ul style="list-style-type: none"> ● 0.5-220m with 62.5 µm multimode cable @ 160/500 MHz*km ● 0.5-220m with 62.5 µm multimode cable @ 200/500 MHz*km ● 0.5-100m with 50 µm multimode cable @ 400/400 MHz*km ● 0.5-220m with 50 µm multimode cable @ 500/500 MHz*km ● 0.5-220m with 50 µm multimode cable @ 1500/500 MHz*km 	
	Cable length	0.5m to 220m
	Fiber type	Multi Mode
Notes	<p>For OM3 cable (50 µm multimode @ 1500/500 MHz*km), a mode-conditioning patch cord is not required. Other multimode cables may require mode-conditioning patch cords to achieve the maximum distances listed above. For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.</p>	
Services	<p>Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	

Accessory Product Details

<p>HP X121 1G SFP LC LH Transceiver (J4860C)</p> <p>A small form-factor pluggable (SFP) Gigabit LH transceiver that provides a full-duplex Gigabit solution up to 70 km on single-mode fiber.</p>	<p>Ports</p> <p>1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics); Duplex: full only</p> <p>Physical characteristics</p> <p>Dimensions: 2.17(d) x 0.60(w) x 0.46(h) in. (5.5 x 1.53 x 1.18 cm) Weight: 0.04 lb. (0.02 kg)</p> <p>Environment</p> <p>Operating temperature: -40°F to 185°F (-40°C to 85°C) Operating relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)</p> <p>Cabling</p> <p>Cable type:</p> <ul style="list-style-type: none"> ● Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1; <p>Maximum distance:</p> <ul style="list-style-type: none"> ● 10-70,000 m (single-mode fiber) <p>Notes</p> <p>Power consumption is 0.8 watts typical with 1 watt maximum at 100% utilization. For distances less than 20 km, a 10 dB attenuator must be used. For distances between 20 km and 40 km, a 5 dB attenuator must be used. Attenuators can be purchased from most cable vendors.</p> <p>Services</p> <p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>
--	--

<p>HP X121 1G SFP LC SX Transceiver (J4858C)</p> <p>A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550 m on multimode fiber.</p>	<p>Ports</p> <p>1 LC 1000BASE-SX port; Duplex: full only</p> <p>Physical characteristics</p> <p>Dimensions: 2.24(d) x 0.54(w) x 0.48(h) in. (5.69 x 1.37 x 1.22 cm) Weight: 0.04 lb. (0.02 kg) Transceiver form factor: SFP</p> <p>Environment</p> <p>Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 85%, noncondensing Nonoperating/Storage temperature: -40°F to 203°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)</p> <p>Electrical characteristics</p> <p>Power consumption typical: 0.4 W Power consumption maximum: 0.7 W</p> <p>Cabling</p> <p>Type:</p> <ul style="list-style-type: none"> ● 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; <p>Maximum distance:</p> <ul style="list-style-type: none"> ● 2-220 m (62.5 µm core diameter, 160 MHz*km bandwidth) ● 2-275 m (62.5 µm core diameter, 200 MHz*km bandwidth) ● 2-500 m (50 µm core diameter, 400 MHz*km bandwidth) ● 2-550 m (50 µm core diameter, 500 MHz*km bandwidth) <p>Cable length: 2-550m Fiber type: Multi Mode</p>
--	---

Accessory Product Details

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X121 1G SFP LC LX Transceiver (J4859C)**Ports**

1 LC 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX); Duplex: full only

Physical characteristics

Dimensions: 2.24(d) x 0.54(w) x 0.486(h) in. (5.69 x 1.37 x 1.23 cm)

Weight: 0.04 lb. (0.02 kg)

Environment

Operating temperature: 32°F to 158°F (0°C to 70°C)

Operating relative humidity: 0% to 85%, noncondensing

Nonoperating/Storage temperature: -40°F to 212°F (-40°C to 100°C)

Altitude: up to 10,000 ft. (3 km)

Cabling

Type:

- Either single mode or multimode; 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;

Maximum distance:

- 2-550 m (multimode 62.5 µm core diameter, 500 MHz*km bandwidth)
- 2-550 m (multimode 50 µm core diameter, 400 MHz*km bandwidth)
- 2-550 m (multimode 50 µm core diameter, 500 MHz*km bandwidth)
- 2-10,000 m (single-mode fiber)

Notes

A mode conditioning patch cord may be needed in some multimode fiber installations.

Wavelength: 1310nm

Power Consumption: < 500mW Typical

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X121 1G SFP RJ45 T Transceiver (J8177C)	Ports	1 RJ-45 1000BASE-T port (IEEE 802.3ab Type 1000BASE-T); Duplex: full only
	Physical characteristics	Dimensions: 2.71(d) x 0.54(w) x 0.55(h) in. (6.88 x 1.37 x 1.4 cm) Weight: 0.06 lb. (0.03 kg)
HP X121 1G SFP RJ45 T Transceiver: An SFP format gigabit transceiver with RJ45 connectors using 1000BaseT technology.	Environment	Operating temperature: 32°F to 158°F (0°C to 70°C); with 100 LFM airflow over the SFP module Operating relative humidity: 0% to 95% @ 75°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Altitude: up to 10,000 ft. (3000 km)
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T; Maximum distance: <ul style="list-style-type: none">• 100 m
	Notes	Power consumption is nominally 1 watt. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J8177C 1000Base-T Mini-GBIC" on the "HP Mini-GBICs and SFPs" Manuals Web page. The J8177C Gigabit copper mini-GBIC is not supported on dual-personality ports. The J8177C is capable of 100 Mb operation. This is supported on only the HP 8200zl, 5400zl, and HP 6200-24G-mGBIC yl Switches using software version K.12.21 or later. Use the "auto-100" port setting to enable 100 Mb operation. Important: The earlier J8177B does not support 100 Mb operation. When used in the Switch gl 20-Port 10/100/1000 Module (J4908A), the J8177C mini-GBIC can be installed in either the upper or lower mini-GBIC port, but will block access to the other port.
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

<p>HP X122 1G SFP LC BX-D Transceiver (J9142B)</p> <p>A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "downstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device.</p>	<p>Ports</p> <p>1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only</p>	<p>Physical characteristics</p> <p>Dimensions 2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)</p> <p>Weight 0.04 lb. (0.02 kg)</p>
<p>Environment</p>	<p>Operating temperature 32°F to 158°F (0°C to 70°C)</p> <p>Operating relative humidity 0% to 95%, non-condensing</p> <p>Non-operating/Storage temperature -40°F to 185°F -40°C to 85°C</p>	<p>Cabling</p> <p>Type: Single-mode fiber optic, complying with ITU-T G.652;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> ● 0.5-10,000 m (single-mode fiber)
<p>Notes</p>	<p>Transmit wavelength: 1490 nm. Receive wavelength: 1310 nm. Power consumption is 1 watt maximum. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device. (A 1000-BX-D transceiver can only connect to a 1000-BX-U product. You cannot connect two 1000-BX-D transceivers together.)</p>	
<p>Services</p>	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>	

<p>HP X122 1G SFP LC BX-U Transceiver (J9143B)</p> <p>A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "upstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device.</p>	<p>Ports</p> <p>1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U); Duplex: full only</p>	<p>Physical characteristics</p> <p>Dimensions 2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)</p> <p>Weight 0.04 lb. (0.02 kg)</p>
<p>Environment</p>	<p>Operating temperature 32°F to 158°F (0°C to 70°C)</p> <p>Operating relative humidity 0% to 95%, non-condensing</p> <p>Non-operating/Storage temperature -40°F to 185°F -40°C to 85°C</p>	<p>Cabling</p> <p>Type: Single-mode fiber optic, complying with ITU-T G.652;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> ● 0.5-10,000 m (single-mode fiber)
<p>Notes</p>	<p>Transmit wavelength: 1310 nm. Receive wavelength: 1490 nm.</p>	

Accessory Product Details

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device. (A 1000-BX-U transceiver can only connect to a 1000-BX-D product. You cannot connect two 1000-BX-U transceivers together.)

Power consumption is 1 watt maximum.

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X132 10G SFP+ LC ER Transceiver (J9153A)

Ports	1 LC 10-GbE port (IEEE 802.3ae Type 10GBASE-ER); Duplex: full only
Connectivity	Connector type LC
Physical characteristics	Wavelength 1550 nm
Physical characteristics	Dimensions 2.22(d) x 0.55(w) x 0.47(h) in. (5.65 x 1.39 x 1.19 cm)
Physical characteristics	Weight .04 lb., Fully loaded
Physical characteristics	Transceiver form factor SFP+
Environment	Operating temperature 32°F to 158°F (0°C to 70°C)
Environment	Operating relative humidity 5% to 95%, noncondensing
Environment	Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)
Environment	Nonoperating/Storage relative humidity 5% to 95%, noncondensing
Environment	Altitude up to 10,000 ft. (3 km)
Electrical characteristics	Power consumption typical 1.3 W
Electrical characteristics	Power consumption maximum 1.5 W
Cabling	Cable type: Single-mode fiber optic, complying with ITU-T G.652;
Cabling	Maximum distance: <ul style="list-style-type: none">● 40km
Cabling	Fiber type Single Mode
Notes	Check switch release notes for minimum version of software required to support this transceiver. Some switches have limits as to how many of this particular transceiver can be installed. See the release notes of the switch software/firmware being used for more details.

Accessory Product Details

Services Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X242 SFP+ SFP+ 1 m Direct Attach Cable (J9281B)

Connectivity	Length	3.28 ft. (1 m)
Physical characteristics	Weight	0.24 lb. (0.11 kg) the cable with an SFP+ transceiver at each end of the cable
Environment	Operating temperature	32°F to 158°F (0°C to 70°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	14°F to 185°F (-10°C to 85°C)
	Nonoperating/Storage relative humidity	5% to 95%, noncondensing
	Altitude	up to 10,000 ft. (3 km)
Electrical characteristics	Notes	0.04 watts maximum per transceiver end
Notes	Electrical Properties	<ul style="list-style-type: none"> • Cable Characteristic Impedance: 100 ohms • Crosstalk between pairs: 2% max • Time delay: 1.31 nsec/ft
	Physical Properties	<ul style="list-style-type: none"> • Cable Diameter: 0.180" • Minimum Cable Bend Radius: 1.0"

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X242 SFP+ SFP+ 3 m Direct Attach Cable (J9283B)

Connectivity	Length	10 ft. (3 m)
Physical characteristics	Weight	.49 lb. (0.22 kg), Fully loaded the cable with an SFP+ transceiver at each end of the cable
Environment	Operating temperature	32°F to 158°F (0°C to 70°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	14°F to 185°F (-10°C to 85°C)
	Nonoperating/Storage relative humidity	5% to 95%, noncondensing
	Altitude	up to 10,000 ft. (3 km)
Electrical characteristics	Notes	0.04 watts maximum per transceiver end
Notes	Electrical Properties	<ul style="list-style-type: none"> • Cable Characteristic Impedance: 100 ohms • Crosstalk between pairs: 2% max • Time delay: 1.31 nsec/ft

Accessory Product Details

	Physical Properties <ul style="list-style-type: none">• Cable Diameter: 0.180"• Minimum Cable Bend Radius: 1.0"
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X242 SFP+ SFP+ 7 m Direct Attach Cable (J9285B)	Connectivity	Length	22.97 ft. (7 m)
	Physical characteristics	Weight	1.02 lb., Fully loaded the cable with an SFP+ transceiver at each end of the cable
		Environment	Operating temperature
	Operating relative humidity		5% to 95%, noncondensing
	Nonoperating/Storage temperature		14°F to 185°F (-10°C to 85°C)
	Nonoperating/Storage relative humidity		5% to 95%, noncondensing
	Electrical characteristics	Altitude	up to 10,000 ft. (3 km)
		Notes	0.04 watts maximum per transceiver end
	Notes	Electrical Properties <ul style="list-style-type: none">• Cable Characteristic Impedance: 100 ohms• Crosstalk between pairs: 2% max• Time delay: 1.31 nsec/ft	
	Services	Physical Properties <ul style="list-style-type: none">• Cable Diameter: 0.180"• Minimum Cable Bend Radius: 1.0"	
Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.			

Accessory Product Details

HP X242 SFP+ to SFP+ 10m Connectivity Direct Attach Copper Cable (J9286B)	Physical characteristics	Length	32.82 ft. (10 m)
		Dimensions	12(d) x 15(w) x 3(h) in. (30.48 x 38.1 x 7.62 cm)
		Weight	0.99 lb. (0.45 kg), Fully loaded the cable with an SFP+ transceiver at each end of the cable
	Environment	Operating temperature	23°F to 185°F (-5°C to 85°C)
		Operating relative humidity	5% to 95%, noncondensing
		Nonoperating/Storage temperature	14°F to 185°F (-10°C to 85°C)
		Nonoperating/Storage relative humidity	5% to 95%, noncondensing
		Altitude	up to 10,000 ft. (3 km)
	Electrical characteristics	Maximum power rating	1.2 W
		Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. 0.6 watts maximum per transceiver end
Notes	Electrical Properties:		
	<ul style="list-style-type: none"> • Cable Characteristic Impedance: 100 ohms 		
Services	Physical Properties:		
	<ul style="list-style-type: none"> • Cable Diameter: 0.185" • Minimum Cable Bend Radius: .555" 		
	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP X242 SFP+ to SFP+ 15m Connectivity Direct Attach Copper Cable (J9287B)	Physical characteristics	Length	49.20 ft. (15 m)
		Dimensions	12(d) x 15(w) x 3(h) in. (30.48 x 38.1 x 7.62 cm)
		Weight	1.74 lb. (0.79 kg), Fully loaded the cable with an SFP+ transceiver at each end of the cable
	Environment	Operating temperature	23°F to 185°F (-5°C to 85°C)
		Operating relative humidity	5% to 95%, noncondensing
		Nonoperating/Storage temperature	14°F to 185°F (-10°C to 85°C)
		Nonoperating/Storage relative humidity	5% to 95%, noncondensing
		Altitude	up to 10,000 ft. (3 km)
	Electrical characteristics	Maximum power rating	1.2 W
		Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical

Accessory Product Details

maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.

0.6 watts maximum per transceiver end

Notes

Electrical Properties:

- Cable Characteristic Impedance: 100 ohms

Physical Properties:

- Cable Diameter: 0.255"
- Minimum Cable Bend Radius: 0.765"

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X244 XFP SFP+ 1 m Direct Attach Cable (J9300A)

A 1m direct attach copper cable with an XFP connector attached on one end and an SFP+ connector attached on the other end. This cable provides a low price connectivity option between switches/servers/storage to interconnect XFP and SFP+ form factors.

Connectivity

Physical characteristics

Environment

Notes

Services

Length

3.28 ft. (1 m)

Weight

.27 lb. (0.12 kg), Fully loaded cable with XFP transceiver on one end and SFP+ on the other end

Operating temperature

32°F to 158°F (0°C to 70°C)

Operating relative humidity

5% to 95%, noncondensing

Nonoperating/Storage temperature

32°F to 158°F (0°C to 70°C)

Nonoperating/Storage relative humidity

5% to 95%, noncondensing

Altitude

up to 10,000 ft. (3 km)

XFP end consumes 2 watts SFP+ end consumes 0.036 watts

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X244 XFP SFP+ 3 m Direct Attach Cable (J9301A) A 3m direct attach copper cable with an XFP connector attached on one end and an SFP+ connector attached on the other end. This cable provides a low price connectivity option between switches/servers/storage to interconnect XFP and SFP+ form factors.	Connectivity	Length	9.84 ft. (3 m)
	Physical characteristics	Weight	.51 lb. (0.23 kg), Fully loaded cable with XFP transceiver on one end and SFP+ on the other end
	Environment	Operating temperature	32°F to 158°F (0°C to 70°C)
	Cabling	Operating relative humidity	5% to 95%, noncondensing
		Nonoperating/Storage temperature	32°F to 158°F (0°C to 70°C)
		Nonoperating/Storage relative humidity	5% to 95%, noncondensing
		Altitude	up to 10,000 ft. (3 km)
Notes	Maximum distance:	• 3m Direct Attach Cable	
Services	XFP end consumes 2 watts SFP+ end consumes 0.036 watts Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP X244 XFP SFP+ 5 m Direct Attach Cable (J9302A) A 5m direct attach copper cable with an XFP connector attached on one end and an SFP+ connector attached on the other end. This cable provides a low price connectivity option between switches/servers/storage to interconnect XFP and SFP+ form factors.	Connectivity	Length	16.4 ft. (5 m)
	Physical characteristics	Weight	.74 lb. (0.34 kg), Fully loaded cable with XFP transceiver on one end and SFP+ on the other end
	Environment	Operating temperature	32°F to 158°F (0°C to 70°C)
	Cabling	Operating relative humidity	5% to 95%, noncondensing
		Nonoperating/Storage temperature	32°F to 158°F (0°C to 70°C)
		Nonoperating/Storage relative humidity	5% to 95%, noncondensing
		Altitude	up to 10,000 ft. (3 km)
Notes	XFP end consumes 2 watts SFP+ end consumes 0.036 watts		
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

**HP 0.5 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ833A)**

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical glass: Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical glass: Bandwidth: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μm multimode optical fiber and designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 1 m Multimode OM3 LC/LC Optical Cable
(AJ834A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 2 m Multimode OM3 LC/LC Optical Cable
(AJ835A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 5 m Multimode OM3 LC/LC Optical Cable **Cabling**
(AJ836A)

Cable type:

50/125 µm core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: This specification defines the detail requirements for a tight buffered duplex fiber optic multimode OM3 50/125 um fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 15 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ837A)

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 30 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ838A)

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 50 m Multimode OM3 LC/LC Optical Cable **Cabling**
(AJ839A)

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
1m Cable (QK732A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core Diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
2m Cable (QK733A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
5m Cable (QK734A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um \pm 3um, Cladding diameter: 125um \pm 2um; Coating diameter: 245 \pm 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
15m Cable (QK735A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um \pm 3um, Cladding diameter: 125um \pm 2um; Coating diameter: 245 \pm 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
30m Cable (QK736A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
50m Cable (QK737A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 1500 W PoE+ zl Power Supply (J9306A)	Physical characteristics	Dimensions	6.05(d) x 7.45(w) x 5.1(h) in. (15.37 x 18.92 x 12.95 cm)
	Environment	Weight	7.5 lb. (3.2 kg)
		Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
		Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
		Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
		Altitude	up to 10,000 ft. (3 km)
	Electrical characteristics	Voltage	110-127/200-240 VAC
		Current	13/10 A
		Maximum power rating	1768 W
		Frequency	50/60 Hz
		Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. The Maximum Power Rating at 120 volts is 1114 watts and at 240 volts is 1768 watts.
	Notes		Each J9306A supplies 600 W chassis power, 300 W of PoE/PoE+ power at 110-127 volts, and 900 W of PoE/PoE+ power at 200-240 volts. One J9306A can power the J8697A chassis. One J9306A can power the J9477A chassis. Two J9306A supplies are required to power the J8698A chassis. Two J9306A supplies are required to power the J8715A chassis.
	Services		Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 1500 W zl Power Supply (J8713A)	Physical characteristics	Dimensions	6.05(d) x 7.45(w) x 5.1(h) in. (15.37 x 18.92 x 12.95 cm)
		Weight	7.5 lb. (3.2 kg)
		Environment	
	Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
		Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
		Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
		Altitude	up to 10,000 ft. (3 km)
		Electrical characteristics	Voltage
	Current		10 A
	Maximum power rating		1800 W
	Frequency		50/60 Hz
	Notes		Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
Notes			200–240 V only. Installation of the J8713A reduces the chassis altitude specification to 10,000 ft. (3677m). <ul style="list-style-type: none">• J8713A supplies 600 W chassis power and 900 W PoE power. See the Ordering Guide for more details on power supply selection for PoE power. Units shipped to North America include a NEMA L6-20P twist lock power cord. Non-locking NEMA 6-20P optionally available - see the Ordering Guide for more details. When used in the J8714A power shelf, the following specs apply (at full load): <ul style="list-style-type: none">• Heat dissipation: 450 BTU/hr (475 kJ/hr) @ 220V• Maximum current: 5.1 A @ 220 V
	Services		

Accessory Product Details

HP 875 W zl Power Supply (J8712A)	Physical characteristics	Dimensions	6.05(d) x 7.45(w) x 5.1(h) in. (15.37 x 18.92 x 12.95 cm)
		Weight	7.05 lb. (3.2 kg)
	Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
		Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
		Nonoperating/Storage relative humidity	15% to 95% @ 158°F (70°C), noncondensing
		Altitude	up to 10,000 ft. (3 km)
	Electrical characteristics	Voltage	100-127/200-240 VAC
		Current	12/5.7 A
		Maximum power rating	1050 W
		Frequency	50/60 Hz
Notes		Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.	
Notes	<p>J8712A supplies 600 W chassis power and 273 W PoE power. One J8712A can power the J8697A chassis. Two J8712A supplies are required to power the J8698A chassis. Two J8712A supplies are required to power the J8715A chassis. See the Ordering Guide for more details on power supply selection for PoE power. When used in the J8714A power shelf, the following specs apply (at full load):</p> <ul style="list-style-type: none"> • Heat dissipation: 250 BTU/hr (263 kJ/hr) @ 110 V, 210 BTU/hr (222 kJ/hr) @ 220 V • Maximum current: 3.2 A @ 110 V, 1.7 A @ 220 V 		
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP zl Power Supply Shelf (J8714A)	Ports	2 external power supply ports Restrictions: PoE power available depends on power supplies installed.	
	Physical characteristics	Dimensions	9.73(d) x 17.44(w) x 5.2(h) in. (24.71 x 44.3 x 13.2 cm) (3U height)
		Weight	9.26 lb. (4.2 kg) (no power supplies installed)
	Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
		Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing

Accessory Product Details

	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Altitude	up to 10,000 ft. (3 km)
	Acoustic	Power: 52.9 dB Pressure: 42.9 dB
Electrical characteristics	Description	Power draw and heat dissipation for the power shelf are dependent on the power supplies installed.
	Notes	For heat dissipation and power requirements of the power shelf, find and add together these figures for the 1 or 2 power supplies actually installed.
Safety		CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950
Emissions		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; > 95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Notes		The HP ProCurve Switch zl Power Supply Shelf has two slots for zl power supplies. It supplies PoE power only to zl switches. For yl switches, see the HP ProCurve 620 Redundant/External Power Supply. Power shelf depth includes 0.75 in. (1.9 cm) due to the power supply handles. Power supplies not included.
Services		Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 5400 zl Premium License (J8994A)

Services

- 3-Year, 9x5 SW phone support, software updates (UT481E)
- 3-year, 24x7 SW phone support, software updates (UT482E)
- 4-year, 24x7 SW phone support, software updates (UT458E)
- 5-year, 24x7 SW phone support, software updates (UT459E)
- 1-year, 24x7 software phone support, software updates (HS532E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP MSM765zl Mobility Controller (J9370A)

Physical characteristics	Dimensions	10.3(d) x 8.13(w) x 1.75(h) in. (26.16 x 20.65 x 4.45 cm)
	Weight	2.05 lb. (0.93 kg)
Mounting	Install the blade in any of the following chassis: HP 5406zl (J8697A), HP 5412zl (J8698A), and HP 8212zl (J8715A)	
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	15% to 95% @ 131°F (55°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95%, noncondensing
Electrical characteristics	Description	IEEE 802.3af PoE compliant or 48 VDC input from included AC power supply
	Maximum heat dissipation	272 BTU/hr (287 kJ/hr)
	Voltage	100-240 VAC
	Current	1.0/0.4 A
	Maximum power rating	80 W
	Frequency	50/60 Hz
Safety	UL 60950-1; CAN/CSA 22.2 No. 60950-1; IEC 60950-1; EN 60950-1	
Emissions	FCC part 15 Class A; EN 55022 Class A; CISPR 22 Class A; ICES-003	
Features	Supported	
	<ul style="list-style-type: none"> ● IEEE 802.11 n/a/b/g access points and/or access devices ● 40 to 200 (in increments of 40) access points and/or access devices ● Unlimited simultaneous users ● 1000 simultaneous guest access users upgradable in increments of 250 per 40 license pack, up to a maximum of 2000 supported users 	
	Included services	
	<ul style="list-style-type: none"> ● WLAN management ● Guest access ● Captive portal ● PCI DSS compliant for wireless PoS traffic 	

Accessory Product Details

- Real-Time Location Services (RTLS)
- Advanced Fast roaming with VoWLAN support
- Mobility Traffic Manager (MTM), with a maximum of 10,000 simultaneous MTM clients
- Support for up to 64 VSC profiles
- Unified policy enforcement and network visibility
- Virtual controller
- No limit on the number of simultaneous non-guest access and/or non-MTM wireless clients

Notes A maximum of four MSM765zl controllers can be installed in the same chassis, and a maximum of three MSM765zl controllers are supported in the 5406zl switch.

Services

- 3-year, 4-hour onsite, 13x5 coverage for hardware (UQ601E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware (UQ602E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UQ604E)
- 3-Year, 9x5 SW phone support, software updates (UQ617E)
- 3-year, 24x7 SW phone support, software updates (UQ618E)
- 4-year, 4-hour onsite, 13x5 coverage for hardware (UQ605E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware (UQ606E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UQ608E)
- 4-year, 24x7 SW phone support, software updates (UQ607E)
- 5-year, 4-hour onsite, 13x5 coverage for hardware (UQ609E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware (UQ610E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UQ612E)
- 5-year, 24x7 SW phone support, software updates (UQ611E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

To learn more, visit: www.hp.com/networking

© Copyright 2009-2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.